


## H-HSRS8 - Nylon PCB self-retaining spacers

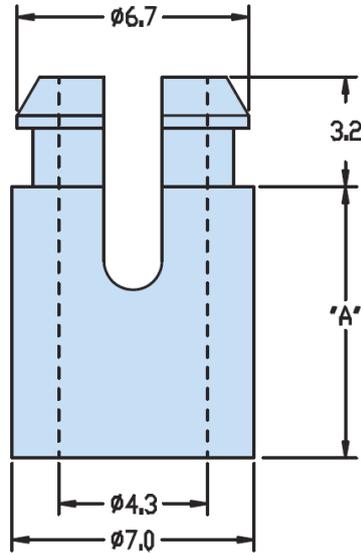

### Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Material Nylon 6/6 UL94 V-0 available on special order**
- **Colour: natural**
- **Temperature Range: -40°C to 85°C**
- #8 or M4 self-tapping screw
- Dimension A = thread depth
- Dimensions:  $\pm 0.1$  mm

Symbol	Height A	Panel thickness	Mounting hole diameter	Thread	Material	Flammability	Color
	[mm]						
H-10649	6.4	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10650	7.9	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10651	9.5	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10652	11.1	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10653	12.7	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10654	15.9	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10655	19.1	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10656	22.2	1.6	5.9	M4	PA 66	UL94 V-2	natural
H-10657	25.4	1.6	5.9	M4	PA 66	UL94 V-2	natural