


H-HTLSP - Nylon PCB Support

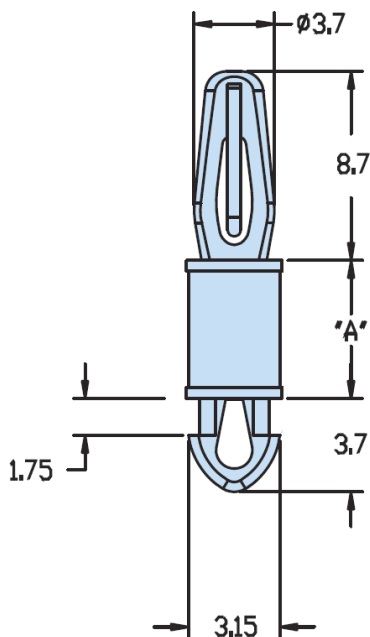

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **UL94 V-0 available on special order**
- **Temperature Range:** -40°C to 85°C
- Dimension A = height
- Dimensions: ± 0.1 mm

Symbol	Height A	Top mounting hole dia.	Top panel thickness range	Bottom mounting hole dia.	Bottom panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-10190	3.2	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10191	4.8	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10192	6.4	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10193	7.9	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10194	9.5	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10195	11.1	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10196	12.7	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural
H-10197	15.9	2.5	1.6 max.	3.2	1.6 max.	PA 66	UL94 V-2	natural