

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-KOS -



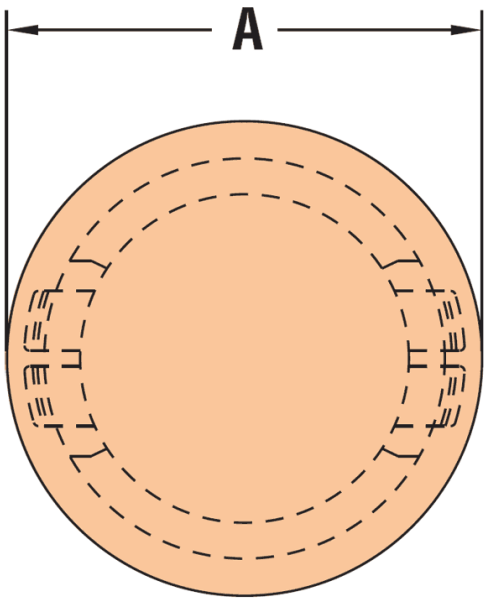

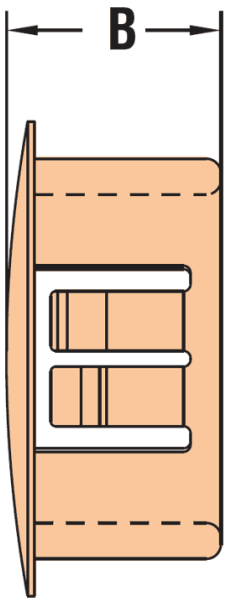

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: silver grey**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CAS file 8919
- Multiple panel thickness design

Symbol	Nominal diameter	Mounting hole diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[in]	[mm]	[mm]	[mm]	[mm]			
H-3997	1/2	22.2	25.8	11.5	3.2 max.	PA 66	UL94 V-2	silver grey
H-3998	3/4	27.8	31	11.5	3.2 max.	PA 66	UL94 V-2	silver grey
H-3999	1	34.9	38.1	11.5	3.2 max.	PA 66	UL94 V-2	silver grey
H-4000	1.1/4	44.5	48.4	12	3.2 max.	PA 66	UL94 V-2	silver grey
H-4001	1.1/2	50.8	54.9	11.5	3.2 max.	PA 66	UL94 V-2	silver grey
H-3991	1/2	22.2	25.8	14.3	6.4 max.	PA 66	UL94 V-2	silver grey
H-3992	3/4	27.8	31	14.3	6.4 max.	PA 66	UL94 V-2	silver grey
H-3993	1	34.9	38.1	14.3	6.4 max.	PA 66	UL94 V-2	silver grey
H-3994	1.1/4	44.5	48.4	14.3	6.4 max.	PA 66	UL94 V-2	silver grey
H-3995	1.1/2	50.8	54.9	14.7	6.4 max.	PA 66	UL94 V-2	silver grey
H-4002	2	63.5	69.3	19.1	6.4 max.	PA 66	UL94 V-2	silver grey