


H-KOS-LT -

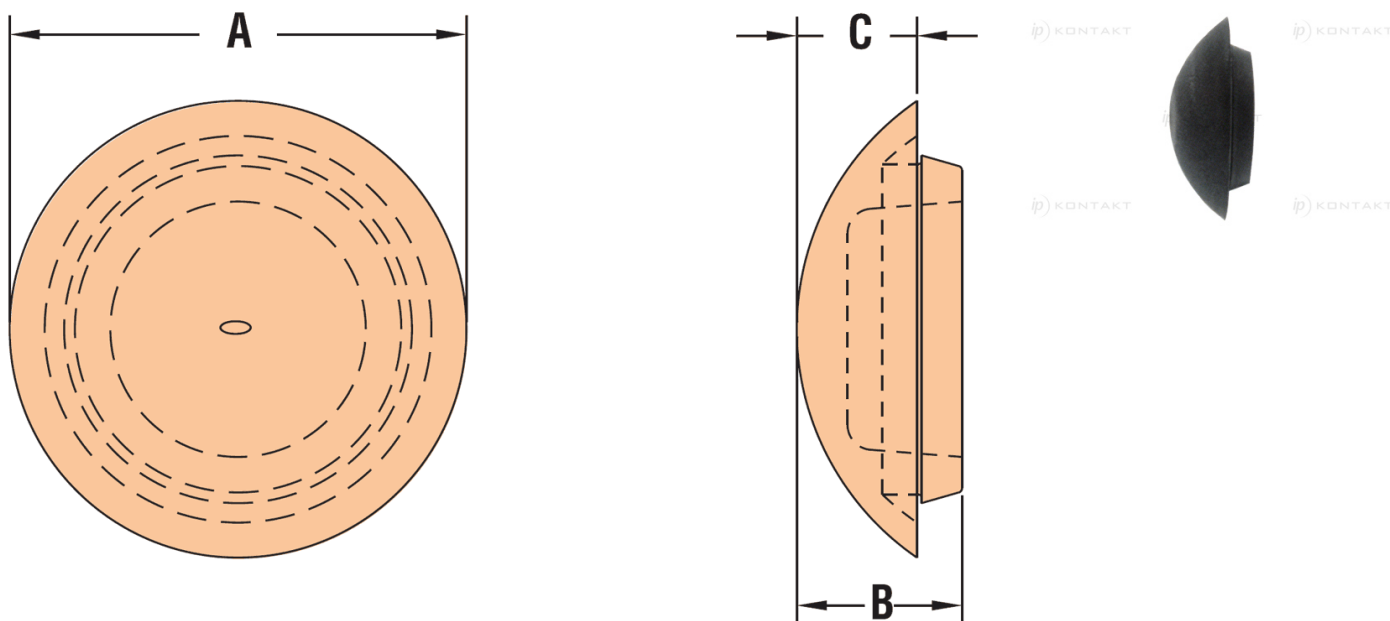

Details:

- **Material: TPE**
- **Flammability Rating: UL94 V-0**
- **Colour: black, grey**
- Temperature Range: -60°C to 135°C
- Certifications: UL File E51579
- Oil tight, rain tight, submersible
- Install with fingertip pressure (no tool required).

Symbol	Mounting hole diameter	Flange diameter A	B	C	Panel thickness range	Shore A hardness	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-3830	12.7	23.1	11.4	7.4	3.2 max.	85	TPE	UL94 V-0	black
H-3834	15.9	26.2	11.9	7.9	3.2 max.	85	TPE	UL94 V-0	black
H-3831	19.1	29.2	13	8.9	3.2 max.	85	TPE	UL94 V-0	black
H-3833	22.2	32.5	13.5	9.1	3.2 max.	85	TPE	UL94 V-0	black
H-3832	25.4	35.8	14.2	10.2	3.2 max.	85	TPE	UL94 V-0	black
H-3835	27.8	38.6	14	10.2	3.2 max.	85	TPE	UL94 V-0	black
H-3837	34.9	45.2	14.5	10.7	3.2 max.	85	TPE	UL94 V-0	black
H-3833FN	22.2	32.5	13.5	9.1	3.2 max.	75	TPE	UL94 V-0	black
H-3833FP	22.2	32.5	13.5	9.1	3.2 max.	75	TPE	UL94 V-0	grey
H-3835FN	27.8	38.6	14	10.2	3.2 max.	75	TPE	UL94 V-0	black
H-3835FP	27.8	38.6	14	10.2	3.2 max.	75	TPE	UL94 V-0	grey
H-3837FN	34.9	45.2	14.3	10.7	3.2 max.	75	TPE	UL94 V-0	black
H-3837FP	34.9	45.2	14.3	10.7	3.2 max.	75	TPE	UL94 V-0	grey