


## H-KR - Releasable Type T Rivets

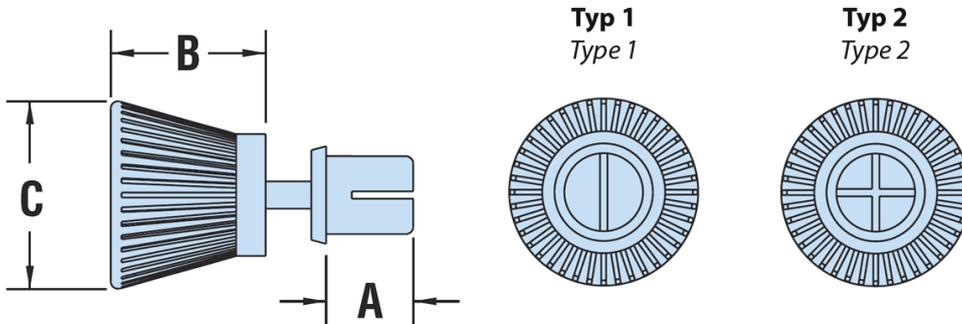

### Details:

- **Material: Nylon 6**
- **Colour: black (BLK) or white (WH)**
- Flammability Rating: UL 94 V-2
- Temperature Range: -40°C to 115°C
- The "T" style rivet is designed with a large finger grip, knob-shaped head for optimal installation and removal by simply pushing or pulling the rivet from the hole.
- Can be used multiple times.
- Standard Pack: 1000 pcs

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Type	Material	Flammability	Color
	[mm]								
H-9088	3.1	1.0 - 2.0	3.5	8	10	1	PA 6	UL94 V-2	black
H-9089	3.1	1.0 - 2.0	3.5	8	10	1	PA 6	UL94 V-2	white
H-9090	3.1	2.0 - 3.0	4.5	8	10	1	PA 6	UL94 V-2	black
H-9091	3.1	2.0 - 3.0	4.5	8	10	1	PA 6	UL94 V-2	white
H-9092	3.1	3.0 - 4.0	5.5	8	10	1	PA 6	UL94 V-2	black
H-9093	3.1	3.0 - 4.0	5.5	8	10	1	PA 6	UL94 V-2	white
H-9094	3.1	4.0 - 5.0	6.5	8	10	1	PA 6	UL94 V-2	black
H-9095	3.1	4.0 - 5.0	6.5	8	10	1	PA 6	UL94 V-2	white
H-9194	3.1	5.0 - 6.0	7.5	8	10	1	PA 6	UL94 V-2	black
H-9195	3.1	5.0 - 6.0	7.5	8	10	1	PA 6	UL94 V-2	white
H-9096	3.1	5.5 - 6.5	8	8	10	1	PA 6	UL94 V-2	black
H-9097	3.1	5.5 - 6.5	8	8	10	1	PA 6	UL94 V-2	white
H-9098	3.6	1.0 - 2.0	3.5	8	10	2	PA 6	UL94 V-2	black
H-9099	3.6	1.0 - 2.0	3.5	8	10	2	PA 6	UL94 V-2	white
H-9100	3.6	2.0 - 3.0	4.5	8	10	2	PA 6	UL94 V-2	black
H-9101	3.6	2.0 - 3.0	4.5	8	10	2	PA 6	UL94 V-2	white
H-9102	3.6	3.0 - 4.0	5.5	8	10	2	PA 6	UL94 V-2	black
H-9103	3.6	3.0 - 4.0	5.5	8	10	2	PA 6	UL94 V-2	white
H-9104	3.6	3.5 - 4.5	6	8	10	2	PA 6	UL94 V-2	black

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-9105	3.6	3.5 - 4.5	6	8	10	2	PA 6	UL94 V-2	white
H-9106	3.6	4.5 - 5.5	7	8	10	2	PA 6	UL94 V-2	black
H-9107	3.6	4.5 - 5.5	7	8	10	2	PA 6	UL94 V-2	white
H-9196	3.6	5.5 - 6.5	8	8	10	2	PA 6	UL94 V-2	black
H-9197	3.6	5.5 - 6.5	8	8	10	2	PA 6	UL94 V-2	white
H-9108	4.1	2.5 - 3.5	5	8	12	2	PA 6	UL94 V-2	black
H-9109	4.1	2.5 - 3.5	5	8	12	2	PA 6	UL94 V-2	white
H-9110	4.1	3.5 - 4.5	6	8	12	2	PA 6	UL94 V-2	black
H-9111	4.1	3.5 - 4.5	6	8	12	2	PA 6	UL94 V-2	white
H-9112	4.1	4.5 - 5.5	7	8	12	2	PA 6	UL94 V-2	black
H-9113	4.1	4.5 - 5.5	7	8	12	2	PA 6	UL94 V-2	white
H-9114	4.1	5.5 - 6.5	8	8	12	2	PA 6	UL94 V-2	black
H-9115	4.1	5.5 - 6.5	8	8	12	2	PA 6	UL94 V-2	white
H-9198	4.1	6.5 - 7.5	9	8	12	2	PA 6	UL94 V-2	black
H-9199	4.1	6.5 - 7.5	9	8	12	2	PA 6	UL94 V-2	white
H-9116	4.1	7.5 - 8.5	10	8	12	2	PA 6	UL94 V-2	black
H-9117	4.1	7.5 - 8.5	10	8	12	2	PA 6	UL94 V-2	white