



H-LTSCG - Liquid Tight Cordgrips

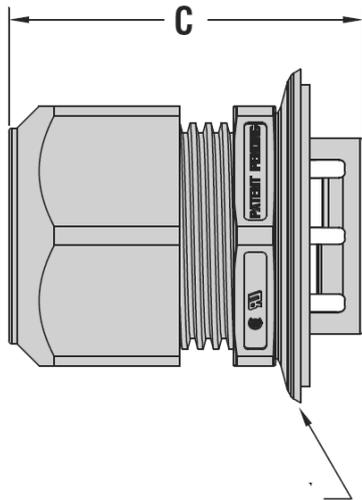

Uszczelka / kołnierz uszczelniający
Sealing flange/washer construction

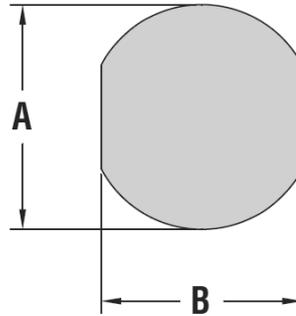

Sugerowany otwór do montażu bezgwintowego
Suggested clearance hole for nonthreaded mounting



Details:

- **Body material: Nylon 6/6**
- **Washer material: TPR lub NBR**
- **Colour: black**
- Ingress protection: IP65
- Easy installation - securely snap into a range of panel thicknesses - up 3,2 mm - with no tools or locknuts required.
- Sealing flange prevents sealing washer displacement due to water velocity to ensure a liquid tight IP 65 seal.
- Eliminate need for locknut or threaded hole to achieve liquid tight seal at panel; perfect for low clearance installation where locking nut access is limited.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.
- Foam washer included.
- Rotation prevented when used in Double D mounting holes.
- We recommend using the fitting with the smallest maximum diameter that will fit your application.

Symbol	Mounting hole dimentions A × B	C	Cable diameter range	Material	Color
	[mm]		[mm]		
H-M3802	12.7 × 11.4	30.7	1.7 - 5.3	PA 66	black
H-M3800	12.7 × 11.4	30.7	2.9 - 6.4	PA 66	black
H-M3808	15.9 × 14	33	1.7 - 5.8	PA 66	black
H-M3806	15.9 × 14	33	2.7 - 8.0	PA 66	black
H-M3814	19.1 × 16.8	37.6	1.8 - 6.4	PA 66	black
H-M3812	19.1 × 16.8	37.6	5.8 - 10.0	PA 66	black
H-M3820	22.2 × 19.6	37.1	2.4 - 6.6	PA 66	black
H-M3818	22.2 × 19.6	37.1	4.3 - 11.4	PA 66	black
H-M3826	25.4 × 22.2	41.1	4.6 - 11.2	PA 66	black
H-M3824	25.4 × 22.2	41.1	6.6 - 13.9	PA 66	black
H-M3838	28.6 × 25.4	44.5	6.4 - 12.3	PA 66	black
H-M3836	28.6 × 25.4	44.5	12.3 - 18.0	PA 66	black

Symbol	Mounting hole dimensions A × B	C	Cable diameter range	Material	Color
	[mm]	[mm]	[mm]		
H-M3844	31.8 × 28.6	52.1	12.4 - 20.0	PA 66	black
H-M3842	31.8 × 28.6	52.1	15.0 - 23.4	PA 66	black
H-M3850	34.9 × 31.8	52.1	12.4 - 20.0	PA 66	black
H-M3848	34.9 × 31.8	52.1	15.0 - 25.4	PA 66	black