


## H-LTTP -



**Zintegrowana uszczelka**  
*Integral sealing ring*

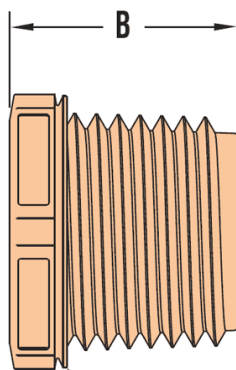

### Details:

- **Material:** Nylon 6/6
- **Colour:** black, grey
- Temperature Range: -40°C to 105°C
- IP Rating: IP 68 (70 PSI, 0.5 MPa)
- Integral sealing ring ensures a superior seal at mounting hole location, every time.

| Symbol  | Ext. thread | Wrench size<br>A | Height<br>B | Material | Flammability | Color |
|---------|-------------|------------------|-------------|----------|--------------|-------|
|         |             | [mm]             | [mm]        |          |              |       |
| H-3582B | M12         | 16               | 13.5        | PA 66    | UL94 V-2     | black |
| H-3582  | M12         | 16               | 13.5        | PA 66    | UL94 V-2     | grey  |
| H-3583B | M16         | 21.1             | 13.5        | PA 66    | UL94 V-2     | black |
| H-3583  | M16         | 21.1             | 13.5        | PA 66    | UL94 V-2     | grey  |
| H-3584B | M20         | 24.9             | 15.8        | PA 66    | UL94 V-2     | black |
| H-3584  | M20         | 24.9             | 15.8        | PA 66    | UL94 V-2     | grey  |
| H-3586B | M32         | 44.2             | 22.1        | PA 66    | UL94 V-2     | black |
| H-3586  | M32         | 44.2             | 22.1        | PA 66    | UL94 V-2     | grey  |
| H-3587B | M40         | 52.3             | 19.8        | PA 66    | UL94 V-2     | black |
| H-3587  | M40         | 52.3             | 19.8        | PA 66    | UL94 V-2     | grey  |
| H-3546B | NPT 1/2     | 24.9             | 20.6        | PA 66    | UL94 V-2     | black |
| H-3546  | NPT 1/2     | 24.9             | 20.6        | PA 66    | UL94 V-2     | grey  |
| H-V3546 | NPT 1/2     | 24.9             | 20.6        | PA 66    | UL94 V-0     | black |
| H-3544B | NPT 1/4     | 16               | 16.8        | PA 66    | UL94 V-2     | black |
| H-3544  | NPT 1/4     | 16               | 16.8        | PA 66    | UL94 V-2     | grey  |
| H-3547B | NPT 3/4     | 32.8             | 21.8        | PA 66    | UL94 V-2     | black |
| H-3547  | NPT 3/4     | 32.8             | 21.8        | PA 66    | UL94 V-2     | grey  |
| H-V3547 | NPT 3/4     | 32.8             | 21.8        | PA 66    | UL94 V-0     | black |
| H-3545B | NPT 3/8     | 21.1             | 17.5        | PA 66    | UL94 V-2     | black |
| H-3545  | NPT 3/8     | 21.1             | 17.5        | PA 66    | UL94 V-2     | grey  |
| H-3548B | NPT 1       | 44.2             | 26.7        | PA 66    | UL94 V-2     | black |
| H-3548  | NPT 1       | 44.2             | 26.7        | PA 66    | UL94 V-2     | grey  |

| Symbol  | Ext. thread | Wrench size<br>A | Height<br>B | Material | Flammability | Color |
|---------|-------------|------------------|-------------|----------|--------------|-------|
|         |             | [mm]             | [mm]        |          |              |       |
| H-V3548 | NPT 1       | 44.2             | 26.7        | PA 66    | UL94 V-0     | black |
| H-3549B | NPT 1 1/4   | 52.3             | 27.4        | PA 66    | UL94 V-2     | black |
| H-3549  | NPT 1 1/4   | 52.3             | 27.4        | PA 66    | UL94 V-2     | grey  |
| H-V3549 | NPT 1 1/4   | 52.3             | 27.4        | PA 66    | UL94 V-0     | black |
| H-3574B | PG 7        | 16               | 13.5        | PA 66    | UL94 V-2     | black |
| H-3574  | PG 7        | 16               | 13.5        | PA 66    | UL94 V-2     | grey  |
| H-3575B | PG 9        | 21               | 13.5        | PA 66    | UL94 V-2     | black |
| H-3575  | PG 9        | 21               | 13.5        | PA 66    | UL94 V-2     | grey  |
| H-3576B | PG 13.5     | 24.9             | 15.8        | PA 66    | UL94 V-2     | black |
| H-3576  | PG 13.5     | 24.9             | 15.8        | PA 66    | UL94 V-2     | grey  |
| H-3401B | PG 21       | 32.8             | 17.3        | PA 66    | UL94 V-2     | black |
| H-3401  | PG 21       | 32.8             | 17.3        | PA 66    | UL94 V-2     | grey  |
| H-3578B | PG 29       | 44.2             | 22.1        | PA 66    | UL94 V-2     | black |
| H-3578  | PG 29       | 44.2             | 22.1        | PA 66    | UL94 V-2     | grey  |
| H-3579B | PG 36       | 52.3             | 19.8        | PA 66    | UL94 V-2     | black |
| H-3579  | PG 36       | 52.3             | 19.8        | PA 66    | UL94 V-2     | grey  |