



H-LTTVP - Liquid Tight Threaded Vent Plugs

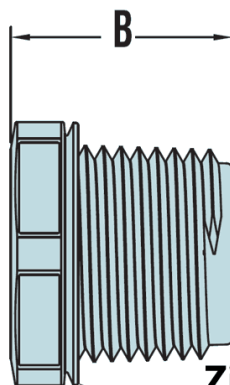

**Zintegrowana
uszczelka**
*Integral sealing
ring*

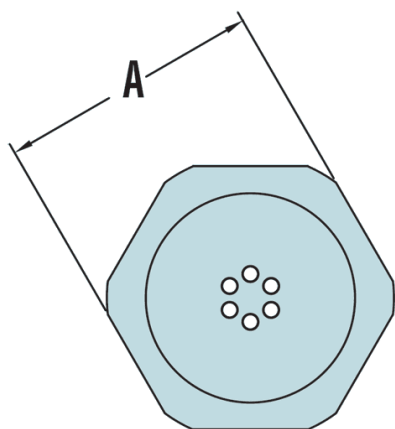

Details:

- **Material:**
 - **Body:** Nylon 6/6
 - **Filter:** Acrylic Copolymer
- **Flammability rating:** UL94 V-2
- **IP rating:** IP 65/66/68
- **IP rating for NPT 3/4" thread:** IP 65
- **Colour:** black, szary
- Temperature range: -40°C to 105°C
- Allow the passage of air for ventilation and heat dissipation, yet prevent moisture intrusion, remain liquid tight.
- Maximum airflow: $\geq 16.6 \text{ LPM}/3.7\text{cm}^2$ @ 13.5 psi.
- Pressure compensating seal prevents buildup of pressure inside of electronic enclosures due to environmental temperature cycling.
- Approximate Head Thickness: 5.3 mm. Thickness may vary.

Symbol	Ext. thread	Wrench size A	Height B	Material	Flammability	Color
		[mm]	[mm]			
H-3582VB	M12	16	13.5	PA 66	UL94 V-2	black
H-3582V	M12	16	13.5	PA 66	UL94 V-2	grey
H-3583VB	M16	21	13.5	PA 66	UL94 V-2	black
H-3583V	M16	21	13.5	PA 66	UL94 V-2	grey
H-3584VB	M20	24.9	15.8	PA 66	UL94 V-2	black
H-3584V	M20	24.9	15.8	PA 66	UL94 V-2	grey
H-3544VB	NPT 1/4	16	16.8	PA 66	UL94 V-2	black
H-3544V	NPT 1/4	16	16.8	PA 66	UL94 V-2	grey
H-3546VB	NPT 1/2	24.9	20.6	PA 66	UL94 V-2	black
H-3546V	NPT 1/2	24.9	20.6	PA 66	UL94 V-2	grey
H-3545VB	NPT 3/8	21	17.5	PA 66	UL94 V-2	black
H-3545V	NPT 3/8	21	17.5	PA 66	UL94 V-2	grey
H-3547VB	NPT 3/4	32.8	21.8	PA 66	UL94 V-2	black
H-3547V	NPT 3/4	32.8	21.8	PA 66	UL94 V-2	grey
H-3574VB	PG 7	16	13.5	PA 66	UL94 V-2	black

Symbol	Ext. thread	Wrench size A	Height B	Material	Flammability	Color
		[mm]	[mm]			
H-3574V	PG 7	16	13.5	PA 66	UL94 V-2	grey
H-3575VB	PG 9	21	13.5	PA 66	UL94 V-2	black
H-3575V	PG 9	21	13.5	PA 66	UL94 V-2	grey
H-3576VB	PG 13.5	24.9	15.8	PA 66	UL94 V-2	black
H-3576V	PG 13.5	24.9	15.8	PA 66	UL94 V-2	grey
H-3401VB	PG 21	32.8	19.3	PA 66	UL94 V-2	black
H-3401V	PG 21	32.8	19.3	PA 66	UL94 V-2	grey