
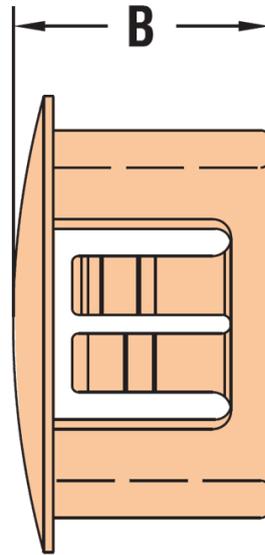


## H-MDP - Snap-In Metric Dome Plugs

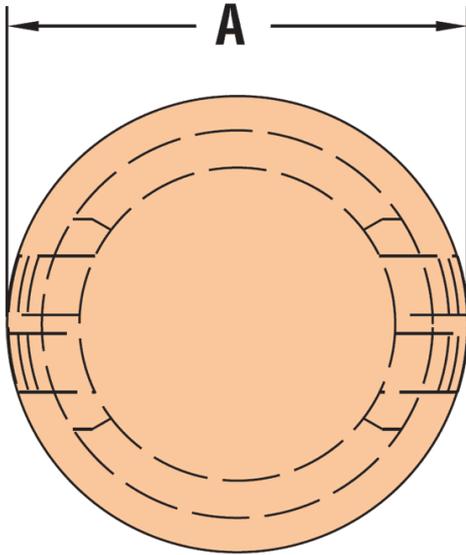

### Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black or white**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- Multiple panel thickness design
- Convex, matte finish

Symbol	Mounting hole diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-2203	13	14.2	10.3	4.1 max.	PA 66	UL94 V-2	black
H-2204	13	14.2	10.3	4.1 max.	PA 66	UL94 V-2	white
H-2128	16	18.5	10.3	4.1 max.	PA 66	UL94 V-2	black
H-2130	16	18.5	10.3	4.1 max.	PA 66	UL94 V-2	white
H-2131	20	22.6	10.3	4.1 max.	PA 66	UL94 V-2	black
H-2132	20	22.6	10.3	4.1 max.	PA 66	UL94 V-2	white
H-2205	22	25.9	11.5	4.1 max.	PA 66	UL94 V-2	black
H-2206	22	25.9	11.5	4.1 max.	PA 66	UL94 V-2	white
H-2133	25	29.8	11.5	4.1 max.	PA 66	UL94 V-2	black
H-2134	25	29.8	11.5	4.1 max.	PA 66	UL94 V-2	white
H-2215	28	31.2	11.5	4.1 max.	PA 66	UL94 V-2	black
H-2216	28	31.2	11.5	4.1 max.	PA 66	UL94 V-2	white
H-2135	32	35.3	11.5	4.1 max.	PA 66	UL94 V-2	black
H-2136	32	35.3	11.5	4.1 max.	PA 66	UL94 V-2	white
H-2218	34.2	38.1	11.5	4.1 max.	PA 66	UL94 V-2	black
H-2219	34.2	38.1	11.5	4.1 max.	PA 66	UL94 V-2	white