
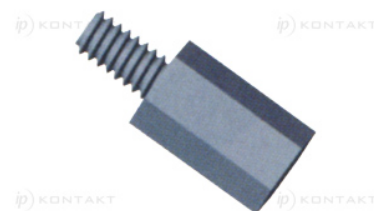


H-MFS4 - Nylon Threaded Hex Supports

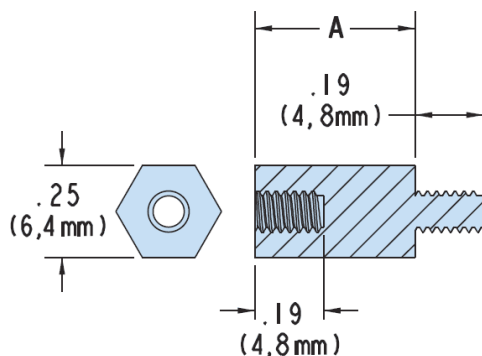

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** -40°C to 85°C
- **Metric dimensions in brackets ±0.1 mm**
- Product no. H-11802 on special order only.
- Recognized under the Component Program of Underwriters' Laboratories File F197049

Symbol	Height A	Int. thread	Int. thread length	Ext. thread	Ext. thread length	Wrench size	Material	Flammability	Color
	[mm]		[mm]		[mm]				
H-11800	6.4	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11801	7	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11802	7.9	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11803	9.5	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11804	11.1	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11805	12.7	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11806	14.3	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11807	15.2	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11808	15.9	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11810	19.1	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11811	22.2	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11813	25.4	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11814	28.6	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11815	31.8	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11817	34.9	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural
H-11818	50.8	UNC 4-40	4.8	UNC 4-40	4.8	6.4	PA 66	UL94 V-2	natural