
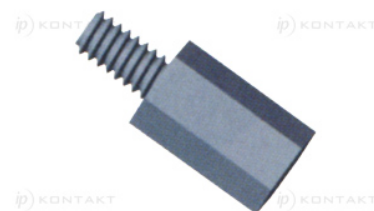


H-MFS6 - Nylon Threaded Hex Supports

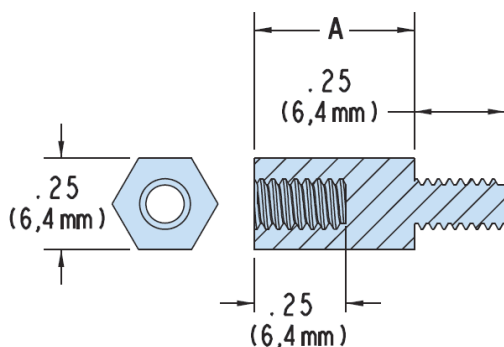

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** -40°C to 85°C
- **Metric dimensions in brackets ±0.1 mm**
- Product no. H-11822 and H-11829 on special order only.
- Recognized under the Component Program of Underwriters' Laboratories File F197049

Symbol	Height A	Int. thread	Int. thread length	Ext. thread	Ext. thread length	Wrench size	Material	Flammability	Color
	[mm]		[mm]		[mm]				
H-11820	6.4	#6-32	4.8	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11822	7.9	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11823	9.5	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11824	11.1	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11825	12.7	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11826	14.3	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11828	15.9	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11829	17.4	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11830	19.1	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11831	22.2	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11832	23.8	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11833	25.4	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11834	28.6	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11835	31.8	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11836	33.3	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11837	34.9	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11838	50.8	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural
H-11839	38.1	#6-32	6.4	#6-32	6.4	6.4	PA 66	UL94 V-2	natural