
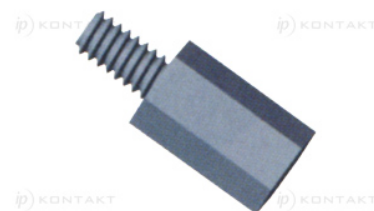


H-MFS8 - Nylon Threaded Hex Supports

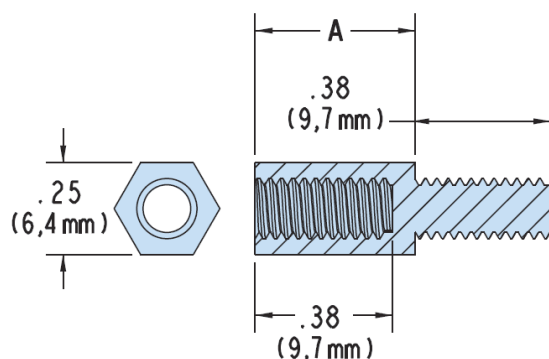

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** -40°C to 85°C
- **Metric dimensions in brackets ±0.1 mm**
- Recognized under the Component Program of Underwriters' Laboratories File F197049

Symbol	Height A	Int. thread	Int. thread length	Ext. thread	Ext. thread length	Wrench size	Material	Flammability	Color
	[mm]		[mm]		[mm]	[mm]			
H-11840	6.4	#8-32	4.8	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11843	9.5	#8-32	5.1	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11844	11.1	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11845	12.7	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11846	14.3	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11848	15.9	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11850	19.1	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11851	22.2	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11853	25.4	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11854	28.6	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11855	31.8	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11857	34.9	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural
H-11858	50.8	#8-32	9.5	#8-32	9.5	6.4	PA 66	UL94 V-2	natural