




## H-MNT - Nylon Cable Tie Variations

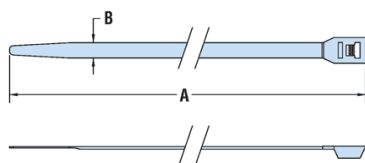


**Niski profil**  
Low Profile

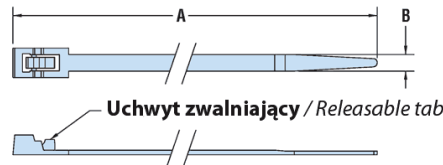

**Zwalniajne**  
Releasable

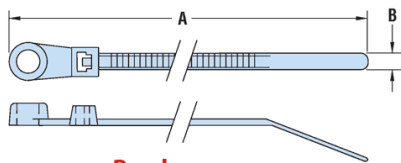

**Przykręcane**  
Screw mount

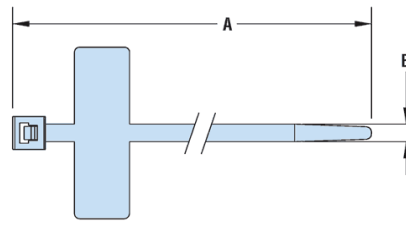

**Identyfikujące**  
Identification

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** see table
- **Temperature Range:** 0°C to 85°C

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	Screw size	Mark area dimensions	Type	Material	Flammability	Color
	[daN]					[mm]				
H-13294	28.9	150	500	9	-	-	low profile	PA 66	UL94 V-2	naturalny
H-13297	17.8	35	151	3.5	-	-	releasable	PA 66	UL94 V-2	naturalny
H-13301	22.2	50	202	4.5	-	-	releasable	PA 66	UL94 V-2	naturalny
H-13302	44.4	73	250	7.5	-	-	releasable	PA 66	UL94 V-2	naturalny
H-13294B	28.9	150	500	9	-	-	low profile	PA 66	UL94 V-2	black
H-13297B	17.8	35	151	3.5	-	-	releasable	PA 66	UL94 V-2	black
H-13301B	22.2	50	202	4.5	-	-	releasable	PA 66	UL94 V-2	black
H-13302B	44.4	73	250	7.5	-	-	releasable	PA 66	UL94 V-2	black
H-13307	8	22	112	2.5	#4	-	screw mount	PA 66	UL94 V-2	naturalny
H-13308	17.8	35	170	3.6	#8	-	screw mount	PA 66	UL94 V-2	naturalny
H-3560	22.2	44.4	203	4.8	#10	-	screw mount	PA 66	UL94 V-2	naturalny
H-13309	22.2	50	220	4.3	#10	-	screw mount	PA 66	UL94 V-2	naturalny
H-13316	8	22	100	2.5	-	8 x 25.4	identification	PA 66	UL94 V-2	naturalny