


## H-MR12 - MaxRunner® Cable Clip Array

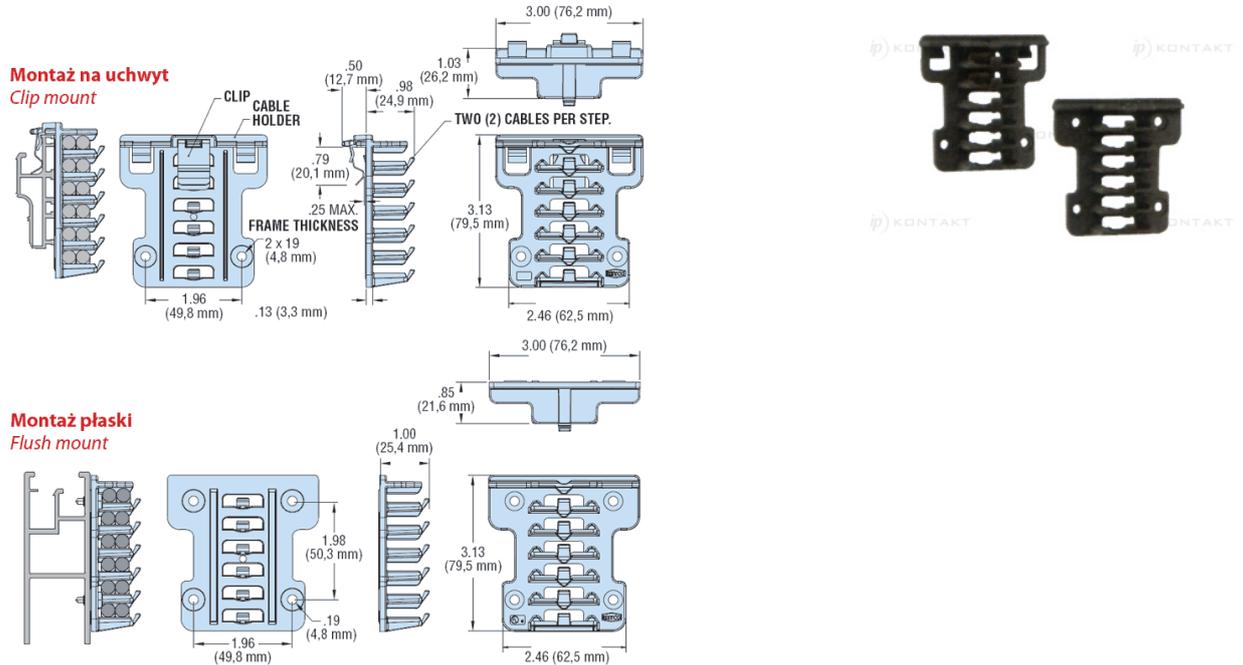

### Details:

- **Material: PPE & PS Noryl (Clip Mount includes a 301 stainless steel mounting clip)**
- **Flammability Rating: UL94 V-0**
- Temperature Range: -40°C to 95°C
- Hold up to 12 cables with wire diameters ranging from 5.2 mm to 7.2 mm
- Patented design is the ultimate multiple strand wire management.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.
- Constructed from PPE+PS flame retardant "Noryl" material with a V-0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- **Clip** is designed to secure the holder to a wide variety of aluminum extruded mounting rails of various profiles with thicknesses up to 6,4 mm.
- **Flush Mount** designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.
- Recommended spacing is 4 feet.
- Certifications: Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523
- Load Rating not to exceed 6.8 kg.
- US Patent No. 8950712B2

Symbol	Panel thickness range	Cable diameter range	Base dimensions	Height	Notes	Material	Flammability
	[mm]	[mm]	[mm]	[mm]			
H-S6403	1.5 - 6.4	5.2 - 7.2	76.2 x 79.5	24.9	clip mount	PPE + PS	UL94 V-0
H-S6433	-	5.2 - 7.2	76.2 x 79.5	25.4	flush mount	PPE + PS	UL94 V-0