


H-NTMP - Nylon cable tie with stainless steel locking device

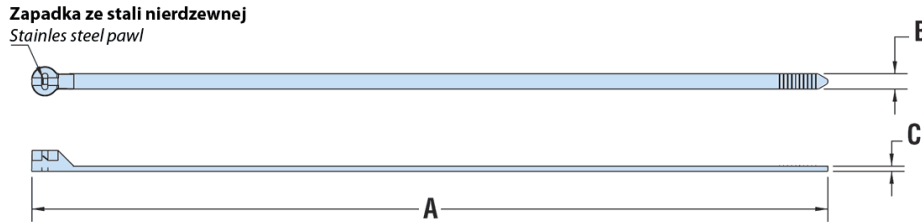

Details:

- **Material:** Nylon 6/6 UL94 V-2 + stainless steel locking pawl
- **Colour:** natural or black
- **Temperature Range:** -40°C to 85°C

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	Thickness C	Material	Flammability	Color
	[daN]	[mm]	[mm]	[mm]	[mm]			
H-13000	8	22	100	3	1.1	PA 66	UL94 V-2	naturalny
H-13000B	8	22	100	3	1.1	PA 66	UL94 V-2	black
H-13001	16	36	150	4	1.2	PA 66	UL94 V-2	naturalny
H-13001B	16	36	150	4	1.2	PA 66	UL94 V-2	black
H-13002	16	53	200	4	1.2	PA 66	UL94 V-2	naturalny
H-13002B	16	53	200	4	1.2	PA 66	UL94 V-2	black
H-13003	20	65	250	5	1.5	PA 66	UL94 V-2	naturalny
H-13003B	20	65	250	5	1.5	PA 66	UL94 V-2	black
H-13004	20	76	300	5	1.5	PA 66	UL94 V-2	naturalny
H-13004B	20	76	300	5	1.5	PA 66	UL94 V-2	black
H-13008	25	53	200	8	1.5	PA 66	UL94 V-2	naturalny
H-13008B	25	53	200	8	1.5	PA 66	UL94 V-2	black
H-13009	25	66	240	8	1.5	PA 66	UL94 V-2	naturalny
H-13009B	25	66	240	8	1.5	PA 66	UL94 V-2	black
H-13010	25	76	300	8	1.5	PA 66	UL94 V-2	naturalny
H-13010B	25	76	300	8	1.5	PA 66	UL94 V-2	black
H-13011	50	76	300	10	1.7	PA 66	UL94 V-2	naturalny
H-13011B	50	76	300	10	1.7	PA 66	UL94 V-2	black
H-13012	50	95	350	10	1.7	PA 66	UL94 V-2	naturalny
H-13012B	50	95	350	10	1.7	PA 66	UL94 V-2	black
H-13013	55	113	400	10	1.7	PA 66	UL94 V-2	naturalny
H-13013B	55	113	400	10	1.7	PA 66	UL94 V-2	black
H-13014	55	120	450	10	1.7	PA 66	UL94 V-2	naturalny
H-13014B	55	120	450	10	1.7	PA 66	UL94 V-2	black

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	Thickness C	Material	Flammability	Color
	[daN]	[mm]	[mm]	[mm]	[mm]			
H-13015	55	158	500	10	1.7	PA 66	UL94 V-2	naturalny
H-13015B	55	158	500	10	1.7	PA 66	UL94 V-2	black