
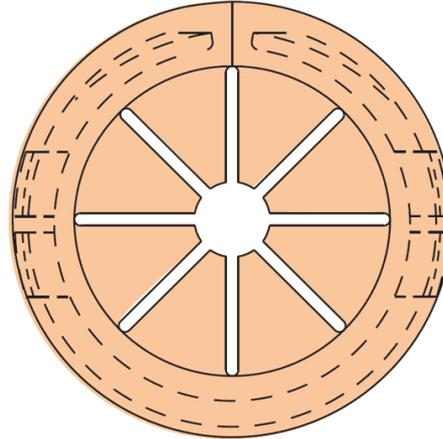


H-OCUB - Open/Closed Universal Bushings

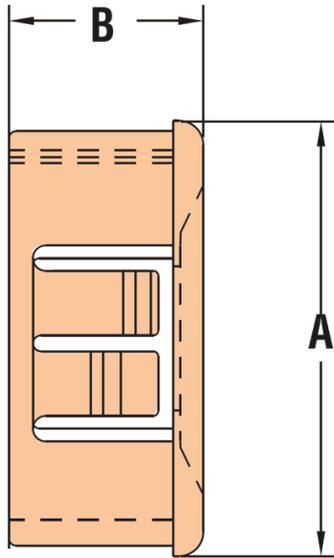

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (white and other colours available on special order)
- **Temperature Range:** -18°C to 105°C

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2055SP	12.7	7.6	14.2	9.8	3.2 max.	PA 66	UL94 V-2	black
H-2077SP	15.9	11.1	17.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2089SP	19.1	12.7	20.3	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2119SP	22.2	14.3	23.4	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2137SP	25.4	19.1	26.7	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2157SP	27.8	20.6	29.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2196SP	31.8	23.8	36.6	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2184SP	34.9	25.4	36.6	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2213SP	38.1	26.9	39.6	10.7	3.2 max.	PA 66	UL94 V-2	black
H-2422SP	50.8	41.7	53.9	10.7	3.2 max.	PA 66	UL94 V-2	black
H-2440SP	63.5	43.2	66	18.3	6.4 max.	PA 66	UL94 V-2	black