


H-PF - Nylon Push-In fasteners

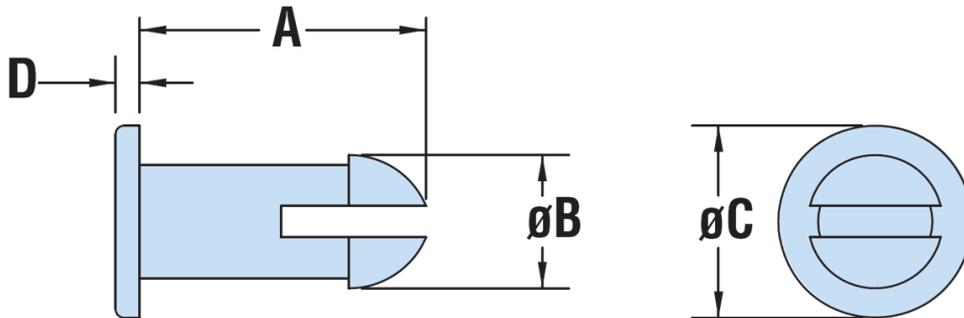

Details:

- **Material: Nylon 6/6**
- **Colour: natural or black**
- Flammability Rating: UL94 V-2
- Temperature Range: 0°C to 85°C

| Symbol | Panel thickness | Mounting hole diameter | A | ØB | Head diameter ØC | Head height D | Material | Flammability | Color | Notes |
|---------|-----------------|------------------------|------|------|------------------|---------------|----------|--------------|---------|---------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | | | | |
| H-0351 | 1.7 | 4.2 | 5.1 | 5.1 | 8.7 | 3.1 | PA 66 | UL94 V-2 | natural | - |
| H-0351B | 1.7 | 4.2 | 5.1 | 5.1 | 8.7 | 3.1 | PA 66 | UL94 V-2 | black | - |
| H-0340 | 2.4 | 2.4 | 4.3 | 2.7 | 7.1 | 0.7 | PA 66 | UL94 V-2 | natural | no slot |
| H-0340B | 2.4 | 2.4 | 4.3 | 2.7 | 7.1 | 0.7 | PA 66 | UL94 V-2 | black | no slot |
| H-0384 | 2.5 | 6.2 | 6.8 | 7.1 | 12.7 | 1.4 | PA 66 | UL94 V-2 | natural | - |
| H-0384B | 2.5 | 6.2 | 6.8 | 7.1 | 12.7 | 1.4 | PA 66 | UL94 V-2 | black | - |
| H-0339 | 2.9 | 2.4 | 5.1 | 3.7 | 6.4 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0339B | 2.9 | 2.4 | 5.1 | 3.7 | 6.4 | 1 | PA 66 | UL94 V-2 | black | - |
| H-0341 | 3.1 | 2.3 | 5.3 | 3.7 | 7.9 | 1 | PA 66 | UL94 V-2 | natural | no slot |
| H-0341B | 3.1 | 2.3 | 5.3 | 3.7 | 7.9 | 1 | PA 66 | UL94 V-2 | black | no slot |
| H-0347 | 3.1 | 2.9 | 6.2 | 3.6 | 5.2 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0347B | 3.1 | 2.9 | 6.2 | 3.6 | 5.2 | 1 | PA 66 | UL94 V-2 | black | - |
| H-0358 | 3.1 | 5.1 | 6.9 | 6.1 | 11.9 | 1.3 | PA 66 | UL94 V-2 | natural | - |
| H-0358B | 3.1 | 5.1 | 6.9 | 6.1 | 11.9 | 1.3 | PA 66 | UL94 V-2 | black | - |
| H-0350 | 3.4 | 4.4 | 6.9 | 5.1 | 8.7 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0350B | 3.4 | 4.4 | 6.9 | 5.1 | 8.7 | 1 | PA 66 | UL94 V-2 | black | - |
| H-0343 | 4 | 2.9 | 7.4 | 3.6 | 5.2 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0343B | 4 | 2.9 | 7.4 | 3.6 | 5.2 | 1 | PA 66 | UL94 V-2 | black | - |
| H-0360 | 3.1 | 5.3 | 7.8 | 5.8 | 11.9 | 1.3 | PA 66 | UL94 V-2 | natural | - |
| H-0360B | 3.1 | 5.3 | 7.8 | 5.8 | 11.9 | 1.3 | PA 66 | UL94 V-2 | black | - |
| H-0370 | 4.3 | 6.6 | 9.1 | 7.5 | 15.1 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0370B | 4.3 | 6.6 | 9.1 | 7.5 | 15.1 | 1.5 | PA 66 | UL94 V-2 | black | - |
| H-0342 | 4.8 | 3.3 | 7.1 | 4.6 | 5.2 | 1 | PA 66 | UL94 V-2 | natural | - |

| Symbol | Panel thickness | Mounting hole diameter | A | ØB | Head diameter ØC | Head height D | Material | Flammability | Color | Notes |
|---------|-----------------|------------------------|------|------|------------------|---------------|----------|--------------|---------|-------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | | | | |
| H-0342B | 4.8 | 3.3 | 7.1 | 4.6 | 5.2 | 1 | PA 66 | UL94 V-2 | black | - |
| H-0352 | 6 | 5.1 | 9.8 | 6 | 11.9 | 1.3 | PA 66 | UL94 V-2 | natural | - |
| H-0352B | 6 | 5.1 | 9.8 | 6 | 11.9 | 1.3 | PA 66 | UL94 V-2 | black | - |
| H-0353 | 6.4 | 5.1 | 10.8 | 5.7 | 8.7 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0353B | 6.4 | 5.1 | 10.8 | 5.7 | 8.7 | 1.5 | PA 66 | UL94 V-2 | black | - |
| H-0362 | 6.4 | 5.5 | 9.1 | 7.2 | 10.3 | 1.1 | PA 66 | UL94 V-2 | natural | - |
| H-0362B | 6.4 | 5.5 | 9.1 | 7.2 | 10.3 | 1.1 | PA 66 | UL94 V-2 | black | - |
| H-0371 | 6.4 | 6.1 | 10.9 | 7.5 | 15.1 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0371B | 6.4 | 6.1 | 10.9 | 7.5 | 15.1 | 1.5 | PA 66 | UL94 V-2 | black | - |
| H-0303 | 6.9 | 4 | 10 | 5.3 | 9.5 | 1.7 | PA 66 | UL94 V-2 | natural | - |
| H-0308 | 6.9 | 6.1 | 11.7 | 7.6 | 11.4 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0310 | 7 | 6.1 | 11.7 | 7.6 | 11.4 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0312 | 8.1 | 4 | 10.9 | 5.3 | 9.9 | 1.3 | PA 66 | UL94 V-2 | natural | - |
| H-0319 | 8.1 | 3 | 10.2 | 3.7 | 5.9 | 0.8 | PA 66 | UL94 V-2 | natural | - |
| H-0322 | 8.6 | 4.4 | 13 | 6.4 | 8.4 | 1.8 | PA 66 | UL94 V-2 | natural | - |
| H-0323 | 9.4 | 6.2 | 14 | 7.6 | 15 | 3.3 | PA 66 | UL94 V-2 | natural | - |
| H-0361 | 9.7 | 5.1 | 13 | 6 | 8.7 | 1 | PA 66 | UL94 V-2 | natural | - |
| H-0327 | 9.7 | 6.1 | 14.2 | 7.6 | 15 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0329 | 10.2 | 3.4 | 13.7 | 4.1 | 7.1 | 2 | PA 66 | UL94 V-2 | natural | - |
| H-0330 | 10.3 | 7 | 14.5 | 8.1 | 15 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0331 | 10.8 | 3.4 | 16.3 | 4.1 | 10.7 | 2.3 | PA 66 | UL94 V-2 | natural | - |
| H-0332 | 12.2 | 6.1 | 17 | 7.6 | 15 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0333 | 14 | 4.6 | 18 | 5.8 | 8.9 | 1.8 | PA 66 | UL94 V-2 | natural | - |
| H-0334 | 17.8 | 6.2 | 22.9 | 8.6 | 12.7 | 2 | PA 66 | UL94 V-2 | natural | - |
| H-0335 | 22.4 | 6.3 | 28.5 | 7.1 | 9.7 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0336 | 22.4 | 6.4 | 28.7 | 7.9 | 9.7 | 1.5 | PA 66 | UL94 V-2 | natural | - |
| H-0337 | 22.6 | 6.6 | 24.1 | 8.6 | 10.4 | 1.8 | PA 66 | UL94 V-2 | natural | - |
| H-0338 | 25.4 | 8.9 | 35.1 | 11.4 | 12.7 | 1.8 | PA 66 | UL94 V-2 | natural | - |
| H-0344 | 25.9 | 8.9 | 35.6 | 12.2 | 12.7 | 1.5 | PA 66 | UL94 V-2 | natural | - |