


H-PMLC - Standoff Lockit™ Clips - Arrowhead Mount

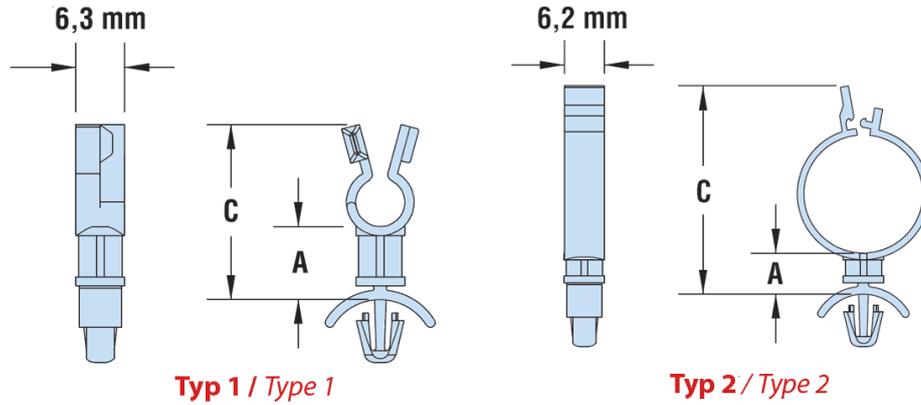

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- **Temperature Range:** 0°C do 85°C
- **Locking ends** click into place

Symbol	Max. cable bundle diameter	Panel thickness range	A	C	Mounting hole diameter	Type	Material	Flammability	Color
	[mm]		[mm]	[mm]					
H-4185	6.4	1.6 max.	4.8	18.3	4.8	1	PA 66	UL94 V-2	natural
H-4186	6.4	1.6 max.	6.4	19.9	4.8	1	PA 66	UL94 V-2	natural
H-4187	6.4	1.6 max.	9.5	23	4.8	1	PA 66	UL94 V-2	natural
H-4188	6.4	1.6 max.	12.7	26.2	4.8	1	PA 66	UL94 V-2	natural
H-4189	6.4	1.6 max.	15.9	29.4	4.8	1	PA 66	UL94 V-2	natural
H-4190	6.4	1.6 max.	25.4	39.9	4.8	1	PA 66	UL94 V-2	natural
H-14185	11.1	0.8 - 2.0	4.8	19.3	4.8	1	PA 66	UL94 V-2	natural
H-14186	11.1	0.8 - 2.0	6.4	20.9	4.8	1	PA 66	UL94 V-2	natural
H-14187	11.1	0.8 - 2.0	9.5	24	4.8	1	PA 66	UL94 V-2	natural
H-14188	11.1	0.8 - 2.0	12.7	27.2	4.8	1	PA 66	UL94 V-2	natural
H-14189	11.1	0.8 - 2.0	15.9	30.4	4.8	1	PA 66	UL94 V-2	natural
H-14190	11.1	0.8 - 2.0	25.4	39.9	4.8	1	PA 66	UL94 V-2	natural
H-4345	11.9	0.8 - 2.0	4.8	24.4	4.8	2	PA 66	UL94 V-2	natural
H-4346	11.9	0.8 - 2.0	6.4	26	4.8	2	PA 66	UL94 V-2	natural
H-4347	11.9	0.8 - 2.0	9.5	29.1	4.8	2	PA 66	UL94 V-2	natural
H-4348	11.9	0.8 - 2.0	12.7	32.3	4.8	2	PA 66	UL94 V-2	natural
H-4191	18.5	0.8 - 2.0	4.8	30.9	4.8	2	PA 66	UL94 V-2	natural
H-4192	18.5	0.8 - 2.0	6.4	32.5	4.8	2	PA 66	UL94 V-2	natural
H-4193	18.5	0.8 - 2.0	9.5	35.6	4.8	2	PA 66	UL94 V-2	natural
H-4194	18.5	0.8 - 2.0	12.7	38.8	4.8	2	PA 66	UL94 V-2	natural
H-4366	11.9	2.0 - 4.0	4.8	24.4	4.8	2	PA 66	UL94 V-2	natural
H-4367	11.9	2.0 - 4.0	6.4	26	4.8	2	PA 66	UL94 V-2	natural
H-4368	11.9	2.0 - 4.0	9.5	29.1	4.8	2	PA 66	UL94 V-2	natural

Symbol	Max. cable bundle diameter	Panel thickness range	A	C	Mounting hole diameter	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-4369	11.9	2.0 - 4.0	12.7	32.3	4.8	2	PA 66	UL94 V-2	natural
H-4195	18.5	2.0 - 4.0	4.8	30.9	4.8	2	PA 66	UL94 V-2	natural
H-4196	18.5	2.0 - 4.0	6.4	32.5	4.8	2	PA 66	UL94 V-2	natural
H-4197	18.5	2.0 - 4.0	9.5	35.6	4.8	2	PA 66	UL94 V-2	natural
H-4198	18.5	2.0 - 4.0	12.7	38.8	4.8	2	PA 66	UL94 V-2	natural