


H-PMLL - Standoff Loops - Arrowhead Mount

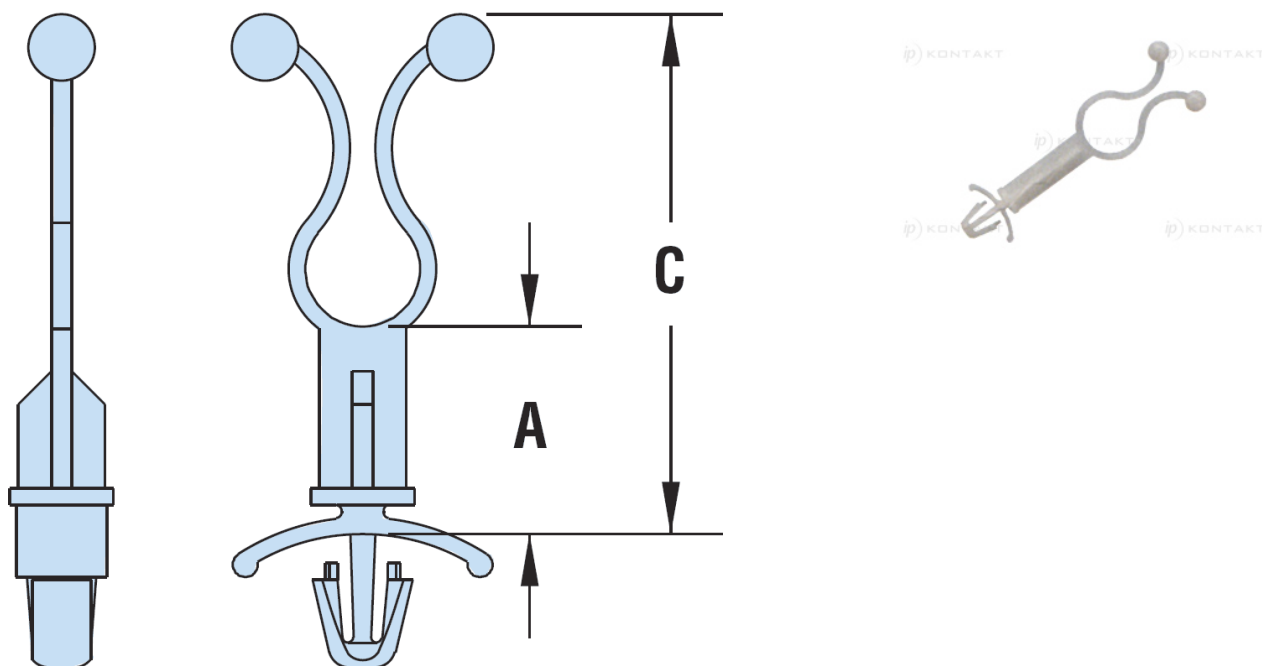

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: 0°C do 85°C
- Barreled ends for greater holding power.
- Smooth rounded edges won't cut into cable's insulations - or installer's hand.
- Locking ends twist into place with fingertip pressure.

Symbol	Panel thickness range	Max. cable bundle diameter	A	C	Mounting hole diameter	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-14155M	0.8 - 2.0	7	4	23.1	4	PA 66	UL94 V-2	natural
H-14155	0.8 - 2.0	7	4.8	23.9	4	PA 66	UL94 V-2	natural
H-14156	0.8 - 2.0	7	12.7	31.8	4	PA 66	UL94 V-2	natural
H-14157	0.8 - 2.0	7	19.1	38.2	4	PA 66	UL94 V-2	natural
H-14158	0.8 - 2.0	7	25.4	44.5	6	PA 66	UL94 V-2	natural
H-4155M	0.8 - 2.0	7	4	23.1	6	PA 66	UL94 V-2	natural
H-4155	0.8 - 2.0	7	4.8	23.9	6	PA 66	UL94 V-2	natural
H-4156	0.8 - 2.0	7	12.7	31.8	6	PA 66	UL94 V-2	natural
H-4157	0.8 - 2.0	7	19.1	38.2	6	PA 66	UL94 V-2	natural
H-4158	0.8 - 2.0	7	25.4	44.5	6	PA 66	UL94 V-2	natural
H-4160	0.8 - 2.0	10	4.8	27.9	6	PA 66	UL94 V-2	natural
H-4161	0.8 - 2.0	10	12.7	35.8	6	PA 66	UL94 V-2	natural
H-4162	0.8 - 2.0	10	19.1	42.2	6	PA 66	UL94 V-2	natural
H-4163	0.8 - 2.0	10	25.4	48.5	6	PA 66	UL94 V-2	natural
H-4165	0.8 - 2.0	12.5	4.8	32.5	6	PA 66	UL94 V-2	natural
H-4166	0.8 - 2.0	12.5	12.7	40.4	6	PA 66	UL94 V-2	natural
H-4167	0.8 - 2.0	12.5	19.1	46.8	6	PA 66	UL94 V-2	natural
H-4168	0.8 - 2.0	12.5	25.4	53.1	6	PA 66	UL94 V-2	natural
H-4170M	0.8 - 2.0	15	4	36.5	6	PA 66	UL94 V-2	natural
H-4170	0.8 - 2.0	15	4.8	37.2	6	PA 66	UL94 V-2	natural
H-4171	0.8 - 2.0	15	12.7	45.2	6	PA 66	UL94 V-2	natural

Symbol	Panel thickness range	Max. cable bundle diameter	A	C	Mounting hole diameter	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-4172	0.8 - 2.0	15	19.1	51.6	6	PA 66	UL94 V-2	natural
H-4173	0.8 - 2.0	15	25.4	57.9	6	PA 66	UL94 V-2	natural
H-3778	2.4 max.	6.4	3.6	23.6	4.7	PA 66	UL94 V-2	natural
H-3779	2.4 max.	9.5	3.6	28.2	4.7	PA 66	UL94 V-2	natural
H-3780	2.4 max.	12.7	3.6	32	4.7	PA 66	UL94 V-2	natural
H-3782	2.4 max.	19.1	3.6	39.4	4.7	PA 66	UL94 V-2	natural
H-3796	1.5 max.	25.4	3.6	56.4	6.4	PA 66	UL94 V-2	natural