
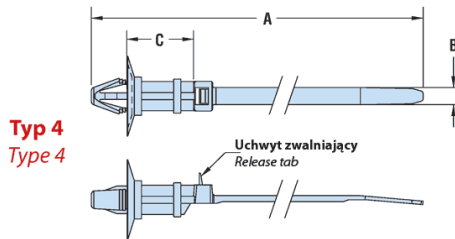
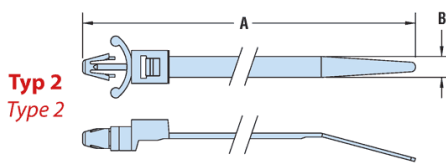
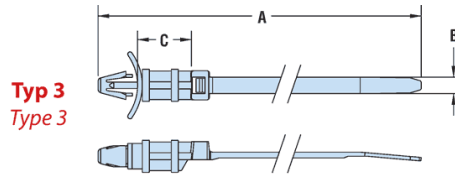


**H-PMT -**

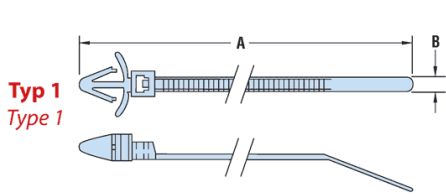

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: natural or UV black**
- **Temperature Range: -40°C to 85°C**

Symbol	Tensile strength	Max. cable bundle diameter	Length A	Width B	C	Panel thickness range	Mounting hole diameter range	Type	Material	Flammability	Color
	[daN]	[mm]	[m]	[mm]	[mm]	[mm]	[mm]				
H-3907	17.8	36	158	3.5	-	2.3	4.7	1	PA 66	UL94 V-2	black
H-13254	22.2	40	180	4.8	-	2.4	4.7	2	PA 66	UL94 V-2	natural
H-13254B	22.2	40	180	4.8	-	2.4	4.7	2	PA 66	UL94 V-2	black
H-3904	22.2	44.5	203	4.8	-	3.2	6.4	1	PA 66	UL94 V-2	natural
H-3905	22.2	44.5	203	4.8	-	3.2	6.4	1	PA 66	UL94 V-2	black
H-13262	8	19.1	128	2.5	6.1	2	4	3	PA 66	UL94 V-2	natural
H-13262B	8	19.1	128	2.5	6.1	2	4	3	PA 66	UL94 V-2	black
H-13267	17.8	35	170	3.6	13	2	5	3	PA 66	UL94 V-2	natural
H-13267B	17.8	35	170	3.6	13	2	5	3	PA 66	UL94 V-2	black
H-13268	17.8	31.8	173	3.6	19.8	2	4.7	3	PA 66	UL94 V-2	natural
H-13268B	17.8	31.8	173	3.6	19.8	2	4.7	3	PA 66	UL94 V-2	black
H-13273	13.3	31.8	168	3.6	13.5	0.6 - 2.5	6.0 - 6.5	4	PA 66	UL94 V-2	natural
H-13273B	13.3	31.8	168	3.6	13.5	0.6 - 2.5	6.0 - 6.5	4	PA 66	UL94 V-2	black