
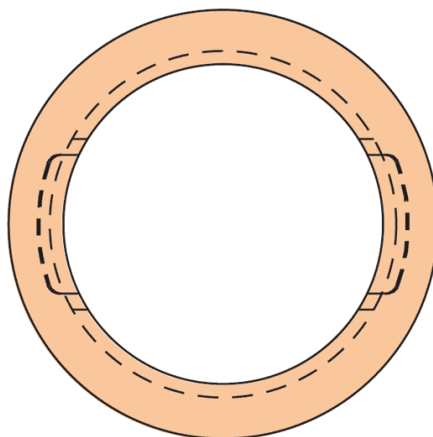


H-POB - Pry out bushing

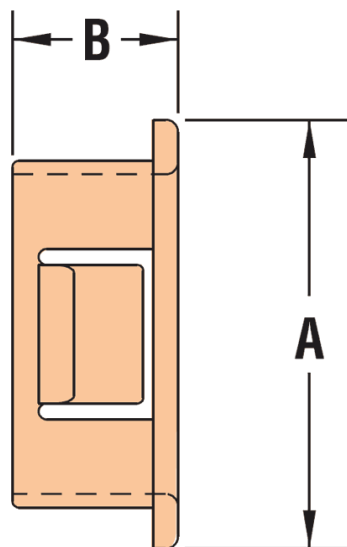

Details:

- **Material:** Nylon 6/6 UL94 V-2 (polypropylene available on special order)
- **Colour:** black
- Temperature Range: -40°C to 105°C
- Retaining fingers without locking steps provide friction fit and allow removal of bushing.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.

Symbol	Mounting hole diameter	Ext. diameter A	Height B	Material	Flammability	Color
	[mm]	[mm]	[mm]			
H-14059	9.5	14.5	10.4	PA 66	UL94 V-2	black
H-14060	9.5	14.5	10.4	PA 66	UL94 V-2	white
H-14065	12.7	17	10.4	PA 66	UL94 V-2	black
H-14066	12.7	17	10.4	PA 66	UL94 V-2	white
H-14071	15.9	20.1	10.4	PA 66	UL94 V-2	black
H-14072	15.9	20.1	10.4	PA 66	UL94 V-2	white
H-14077	19	24.6	10.4	PA 66	UL94 V-2	black
H-14078	19	24.6	10.4	PA 66	UL94 V-2	white
H-14083	22.2	26.7	10.4	PA 66	UL94 V-2	black
H-14084	22.2	26.7	10.4	PA 66	UL94 V-2	white
H-14086	25.4	30.5	10.4	PA 66	UL94 V-2	black
H-14087	25.4	30.5	10.4	PA 66	UL94 V-2	white
H-14089	27.8	33	10.4	PA 66	UL94 V-2	black
H-14090	27.8	33	10.4	PA 66	UL94 V-2	white
H-14098	34.9	40.1	11.4	PA 66	UL94 V-2	black
H-14099	34.9	40.1	11.4	PA 66	UL94 V-2	white