


H-POP - Pry out plugs

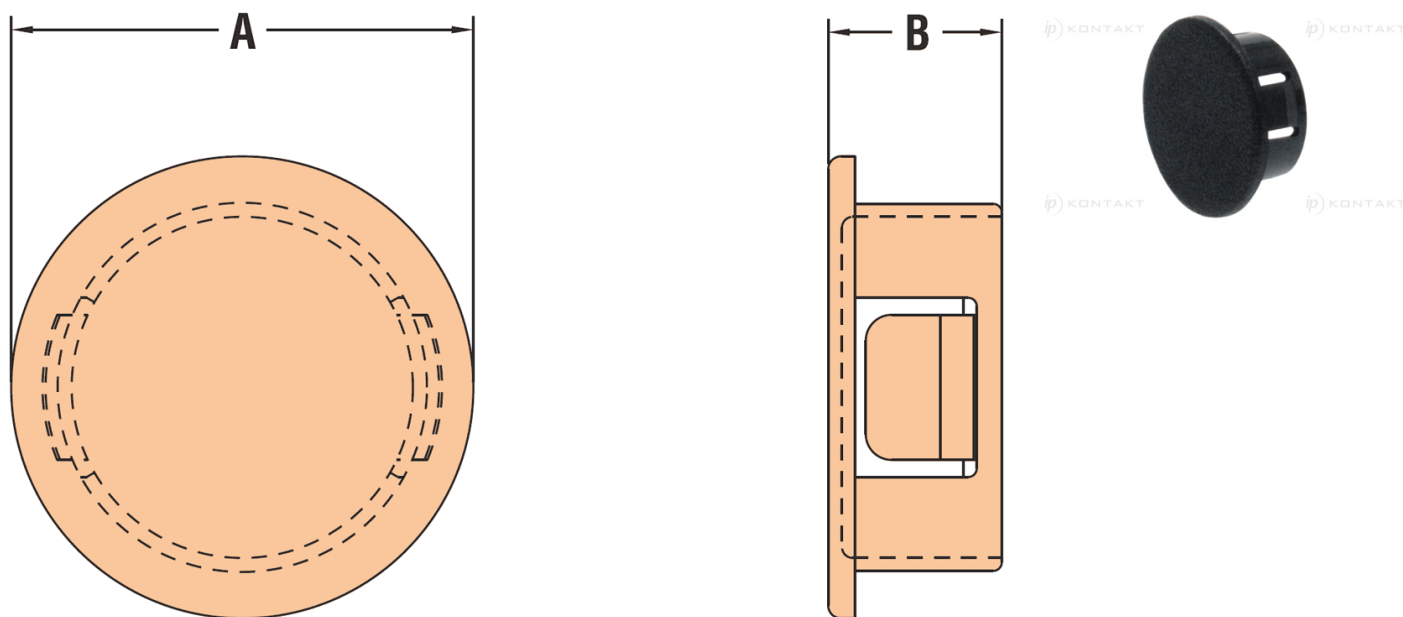

Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black BLK, white (WH), (white and other colours on special order only)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919

Symbol	Mounting hole diameter	A	B	Panel thickness range	Material	Flammability	Color
	[mm]			[mm]			
H-3053	6.4	10.7	8.3	4.0 max.	PA 66	UL94 V-2	black
H-3054	6.4	10.7	8.3	4.0 max.	PA 66	UL94 V-2	white
H-3056	7.9	12.9	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3057	7.9	12.9	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3059	9.5	14.7	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3060	9.5	14.7	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3062	11.1	15.5	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3063	11.1	15.5	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3065	12.7	17	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3066	12.7	17	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3068	14.3	18.6	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3069	14.3	18.6	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3071	15.9	20.2	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3072	15.9	20.2	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3074	17.4	22.6	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3075	17.4	22.6	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3077	19	24.6	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3078	19	24.6	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3080	20.6	26.2	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3081	20.6	26.2	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3083	22.2	27.4	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3084	22.2	27.4	10.4	4.4 max.	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter	A	B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-3086	25.4	30.9	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3087	25.4	30.9	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3089	27.8	32.9	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3090	27.8	32.9	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3092	30.1	35.7	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3093	30.1	35.7	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3095	31.8	36.9	10.4	4.4 max.	PA 66	UL94 V-2	black
H-3096	31.8	36.9	10.4	4.4 max.	PA 66	UL94 V-2	white
H-3098	34.9	40.1	11.5	4.4 max.	PA 66	UL94 V-2	black
H-3099	34.9	40.1	11.5	4.4 max.	PA 66	UL94 V-2	white
H-3124	38.1	43.6	11.5	6.4 max.	PA 66	UL94 V-2	black
H-3125	38.1	43.6	11.5	6.4 max.	PA 66	UL94 V-2	white
H-2973	44.5	50.3	12.2	6.4 max.	PA 66	UL94 V-2	black
H-2974	44.5	50.3	12.2	6.4 max.	PA 66	UL94 V-2	white
H-2798	50.8	56.4	12.2	6.4 max.	PA 66	UL94 V-2	black
H-2799	50.8	56.4	12.2	6.4 max.	PA 66	UL94 V-2	white
H-2975	63.5	68.4	18.8	6.4 max.	PA 66	UL94 V-2	black
H-2976	63.5	68.4	18.8	6.4 max.	PA 66	UL94 V-2	white