


H-PPL -

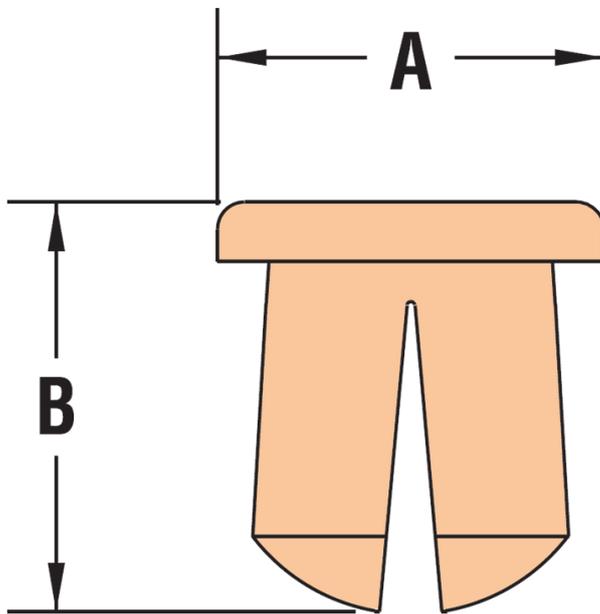

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black and natural**
- Temperature Range: 0°C to 85°C
- Flexible and tapered prongs on plug will snugly lock in place with fingertip pressure, but can be removed & reused.
- Durable and non-conductive.
- Excellent dust protection for electronic equipment.
- Abrasion and vibration resistant.
- May be used as temporary or permanent hole plugs.
- Function as feet on small appliances.
- May be used to close tube ends.

Symbol	Mounting hole diameter range	Panel thickness range	Head diameter ØA	B	Material	Flammability	Color	Notes
	[mm]	[mm]	[mm]	[mm]				
H-12170	4.7 - 4.9	0.8 - 1.6	8.9	4.6	PA 66	UL94 V-2	black	glossy head
H-12171	4.7 - 4.9	0.8 - 1.6	8.9	4.6	PA 66	UL94 V-2	natural	glossy head
H-12178	8.0 - 8.1	1.2 - 4.0	14.7	10.4	PA 66	UL94 V-2	black	dome head
H-12179	8.0 - 8.1	1.2 - 4.0	14.7	10.4	PA 66	UL94 V-2	natural	dome head
H-12182	9.5 - 9.7	2.4 - 7.9	12.4	13.5	PA 66	UL94 V-2	black	glossy head
H-12183	9.5 - 9.7	2.4 - 7.9	12.4	13.5	PA 66	UL94 V-2	natural	glossy head