
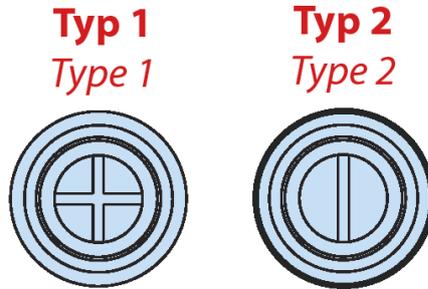


H-PR-HR - Heat Resistant Snap Rivets

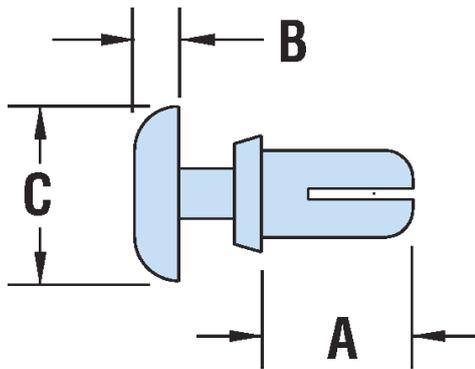

Details:

- **Material:** Nylon 4/6
- **Colour:** tan (beige)
- Flammability Rating: UL 94 V-2
- Temperature Range: -18°C to 130°C
- Designed for fast and easy installation with no tools - just fingertip pressure required

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Extraction force [daN]	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]					
H-9028H	3.1	1.0 - 2.0	3.5	1.6	6.4	78	2	PA 46	UL94 V-2	beige
H-9030H	3.1	2.0 - 3.0	4.5	1.6	6.4	78	2	PA 46	UL94 V-2	beige
H-9032H	3.1	3.0 - 4.0	5.6	1.6	6.4	78	2	PA 46	UL94 V-2	beige
H-9034H	3.1	4.0 - 5.0	6.5	1.6	6.4	78	2	PA 46	UL94 V-2	beige
H-9038H	3.1	5.5 - 6.5	8	1.6	6.4	78	2	PA 46	UL94 V-2	beige
H-9044H	3.6	1.2 - 2.1	3.5	1.6	6.4	118	1	PA 46	UL94 V-2	beige
H-9046H	3.6	2.1 - 3.0	4.5	1.6	6.4	118	1	PA 46	UL94 V-2	beige
H-9048H	3.6	2.7 - 3.6	5	1.6	6.4	118	1	PA 46	UL94 V-2	beige
H-9050H	3.6	3.0 - 4.0	5.6	1.6	6.4	118	1	PA 46	UL94 V-2	beige
H-9058H	4.1	2.5 - 3.5	5	1.8	8	196	1	PA 46	UL94 V-2	beige
H-9060H	4.1	3.5 - 4.5	6	1.8	8	196	1	PA 46	UL94 V-2	beige
H-9062H	4.1	4.5 - 5.5	7	1.8	8	196	1	PA 46	UL94 V-2	beige
H-9064H	4.1	5.5 - 6.5	8	1.8	8	196	1	PA 46	UL94 V-2	beige
H-9068H	4.1	7.5 - 8.5	10	1.8	8	196	1	PA 46	UL94 V-2	beige