




H-PRH - Countersunk Type H Rivets

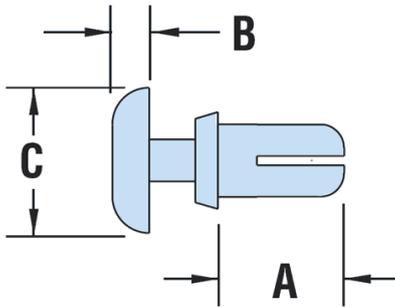

Details:

- **Material: Nylon 6**
- **Color: black (BLK) or white (WH)**
- Temperature range: -40°C to 85°C
- No tools required.

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Pull out force	Type	Material	Flammability	Color
	[mm]									
H-9118	2.6	5.5 - 6.5	8.5	0.7	4.6	49	1	PA 6	UL94 V-2	black
H-9118F	2.6	5.5 - 6.5	8.5	0.7	4.6	49	1	PA 6	UL94 V-0	black
H-9119	2.6	5.5 - 6.5	8.5	0.7	4.6	49	1	PA 6	UL94 V-2	white
H-9156	3.1	1.0 - 2.0	3.5	1	6.4	78	1	PA 6	UL94 V-2	black
H-9156F	3.1	1.0 - 2.0	3.5	1	6.4	78	1	PA 6	UL94 V-0	black
H-9157	3.1	1.0 - 2.0	3.5	1	6.4	78	1	PA 6	UL94 V-2	white
H-9158	3.1	2.0 - 3.0	4.5	1	6.4	78	1	PA 6	UL94 V-2	black
H-9158F	3.1	2.0 - 3.0	4.5	1	6.4	78	1	PA 6	UL94 V-0	black
H-9159	3.1	2.0 - 3.0	4.5	1	6.4	78	1	PA 6	UL94 V-2	white
H-9160	3.1	3.0 - 4.0	5.5	1	6.4	78	1	PA 6	UL94 V-2	black
H-9160F	3.1	3.0 - 4.0	5.5	1	6.4	78	1	PA 6	UL94 V-0	black
H-9161	3.1	3.0 - 4.0	5.5	1	6.4	78	1	PA 6	UL94 V-2	white
H-9162	3.1	4.0 - 5.0	6.5	1	6	78	1	PA 6	UL94 V-2	black
H-9162F	3.1	4.0 - 5.0	6.5	1	6	78	1	PA 6	UL94 V-0	black
H-9163	3.1	4.0 - 5.0	6.5	1	6	78	1	PA 6	UL94 V-2	white
H-9164	3.1	5.0 - 6.0	7.5	1	6	78	1	PA 6	UL94 V-2	black
H-9164F	3.1	5.0 - 6.0	7.5	1	6	78	1	PA 6	UL94 V-0	black
H-9165	3.1	5.0 - 6.0	7.5	1	6	78	1	PA 6	UL94 V-2	white
H-9166	3.1	5.5 - 6.5	8	1	6	78	1	PA 6	UL94 V-2	black
H-9166F	3.1	5.5 - 6.5	8	1	6	78	1	PA 6	UL94 V-0	black
H-9167	3.1	5.5 - 6.5	8	1	6	78	1	PA 6	UL94 V-2	white
H-9168	3.1	6.5 - 7.5	9	1	6.4	78	1	PA 6	UL94 V-2	black

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Pull out force	Type	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[N]				
H-9168F	3.1	6.5 - 7.5	9	1	6.4	78	1	PA 6	UL94 V-0	black
H-9169	3.1	6.5 - 7.5	9	1	6.4	78	1	PA 6	UL94 V-2	white
H-9170	3.1	7.5 - 8.5	10	1	6.4	78	1	PA 6	UL94 V-2	black
H-9170F	3.1	7.5 - 8.5	10	1	6.4	78	1	PA 6	UL94 V-0	black
H-9171	3.1	7.5 - 8.5	10	1	6.4	78	1	PA 6	UL94 V-2	white
H-9172	3.6	1.0 - 2.0	3.5	1	6.4	118	2	PA 6	UL94 V-2	black
H-9172F	3.6	1.0 - 2.0	3.5	1	6.4	118	2	PA 6	UL94 V-0	black
H-9173	3.6	1.0 - 2.0	3.5	1	6.4	118	2	PA 6	UL94 V-2	white
H-9174	3.6	2.0 - 3.0	4.5	1	6.4	118	2	PA 6	UL94 V-2	black
H-9174F	3.6	2.0 - 3.0	4.5	1	6.4	118	2	PA 6	UL94 V-0	black
H-9175	3.6	2.0 - 3.0	4.5	1	6.4	118	2	PA 6	UL94 V-2	white
H-9176	3.6	3.0 - 4.0	5.5	1	6	118	2	PA 6	UL94 V-2	black
H-9176F	3.6	3.0 - 4.0	5.5	1	6	118	2	PA 6	UL94 V-0	black
H-9177	3.6	3.0 - 4.0	5.5	1	6	118	2	PA 6	UL94 V-2	white
H-9178	3.6	3.5 - 4.5	6	1	6	118	2	PA 6	UL94 V-2	black
H-9178F	3.6	3.5 - 4.5	6	1	6	118	2	PA 6	UL94 V-0	black
H-9179	3.6	3.5 - 4.5	6	1	6	118	2	PA 6	UL94 V-2	white
H-9180	3.6	4.5 - 5.5	7	1	6	118	2	PA 6	UL94 V-2	black
H-9180F	3.6	4.5 - 5.5	7	1	6	118	2	PA 6	UL94 V-0	black
H-9181	3.6	4.5 - 5.5	7	1	6	118	2	PA 6	UL94 V-2	white
H-9182	3.6	5.5 - 6.5	8	1	6	118	2	PA 6	UL94 V-2	black
H-9183	3.6	5.5 - 6.5	8	1	6	118	2	PA 6	UL94 V-2	white