
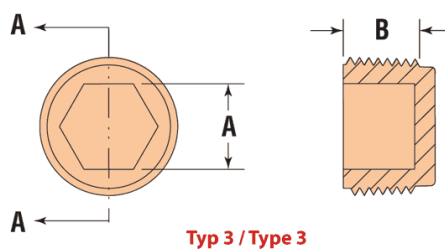
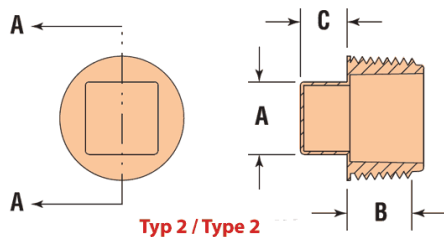


H-PTN -

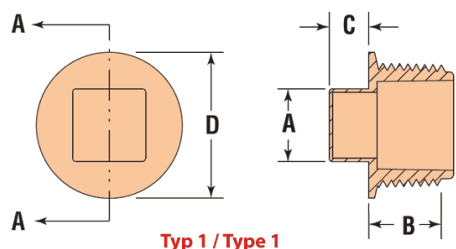

Details:

- **Material: HDPE**
- **Colour: black**
- Temperature Range: -18°C to 74°C
- Not intended for permanent applications; commonly used for low-pressure testing and in-plant processing.
- Keep contaminants and moisture from threaded ports.
- Applicable Spec: MIL-C-5501/5, NAS 840.

Symbol	Type	Ext. thread	Wrench size A	B	C	D	Material	Color
			[mm]					
H-G5440	1	NPT 1/8	10.9	7.4	4.8	14.2	HDPE	black
H-G5441	1	NPT 1/4	11.2	9	6.4	17.5	HDPE	black
H-G5442	1	NPT 3/8	11.2	10.4	6.4	20.6	HDPE	black
H-G5443	1	NPT 1/2	14.2	11.9	6.4	25.4	HDPE	black
H-G5444	1	NPT 3/4	16	13.2	6.4	31.8	HDPE	black
H-G5449	2	NPT 3/4	15.7	13.2	6.4	-	HDPE	black
H-G5450	2	NPT 1	20.6	15	6.4	-	HDPE	black
H-G5451	2	NPT 1.1/4	25.4	21.1	9.7	-	HDPE	black
H-G5452	2	NPT 1.1/2	31.8	21.1	9.7	-	HDPE	black
H-G5455	3	NPT 1/4	6.4	7.9	-	-	HDPE	black
H-G5456	3	NPT 3/8	7.9	9.7	-	-	HDPE	black
H-G5457	3	NPT 1/2	9.7	9.7	-	-	HDPE	black
H-G5458	3	NPT 3/4	14.2	12.7	-	-	HDPE	black
H-G5459	3	NPT 1	16	13.5	-	-	HDPE	black