



H-RDD - Strain relief bushings


Typ 1 / Type 1

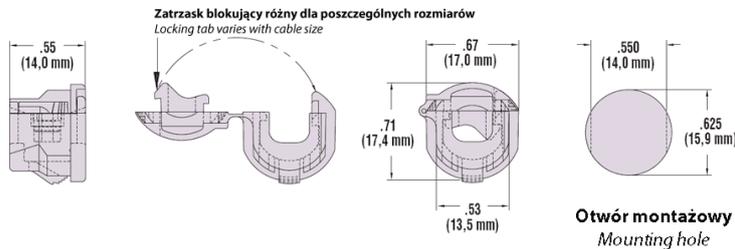

Typ 2 / Type 2

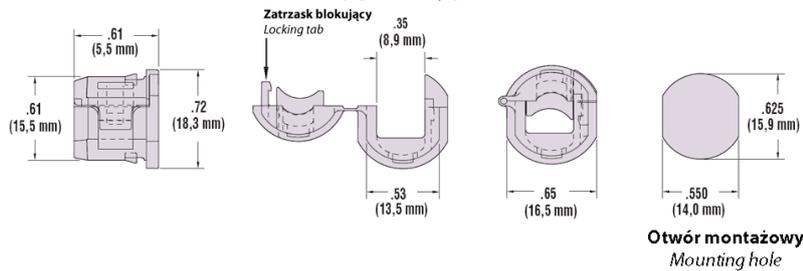

Typ 3 / Type 3

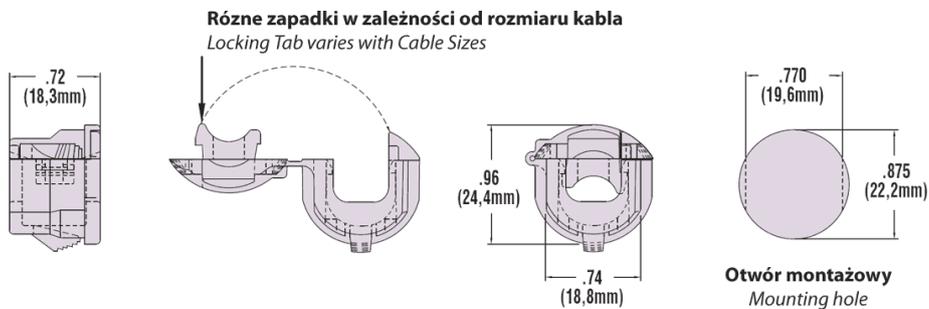

Details:

- **Material:** Nylon 6/6
- **Flammability:** UL94 V-2
- Temperature Range: -18°C to 105°C
- Certifications Recognized under UL File E15331
- Certified by the Canadian Standards Association File 8919

Symbol	Type	Cable diameter range	Panel thickness range	Material	Flammability	Color
		[mm]	[mm]			
H-1870	1	3.3 - 5.3	0.8, 1.1, 1.2, 1.6, 2.5	PA 66	UL94 V-2	black
H-1871	1	3.3 - 5.3	0.8, 1.1, 1.2, 1.6, 2.5	PA 66	UL94 V-2	white
H-1852	1	5.6 - 7.4	0.8, 1.1, 1.2, 1.6, 2.5	PA 66	UL94 V-2	black
H-1853	1	5.6 - 7.4	0.8, 1.1, 1.2, 1.6, 2.5	PA 66	UL94 V-2	white

Symbol	Type	Cable diameter range	Panel thickness range	Material	Flammability	Color
		[mm]	[mm]			
H-1800	2	7.6 - 8.4	1.6	PA 66	UL94 V-2	black
H-1801	2	7.6 - 8.4	1.6	PA 66	UL94 V-2	white
H-1855	3	7.4 - 9.8	2.0, 3.4	PA 66	UL94 V-2	black
H-1856	3	7.4 - 9.8	2.0, 3.4	PA 66	UL94 V-2	white
H-1857	3	7.4 - 9.8	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	black
H-1858	3	7.4 - 9.8	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	white
H-1859	3	8.6 - 10.9	2.0, 3.4	PA 66	UL94 V-2	black
H-1860	3	8.6 - 10.9	2.0, 3.4	PA 66	UL94 V-2	white
H-1861	3	8.6 - 10.9	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	black
H-1862	3	8.6 - 10.9	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	white
H-1865	3	10.7 - 11.4	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	black
H-1866	3	10.7 - 11.4	0.8, 1.6, 2.5, 3.2, 4.0	PA 66	UL94 V-2	white
H-1882	3	10.7 - 11.4	2.0, 3.4	PA 66	UL94 V-2	black
H-1883	3	10.7 - 11.4	2.0, 3.4	PA 66	UL94 V-2	white