


H-RR - Ratchet rivets

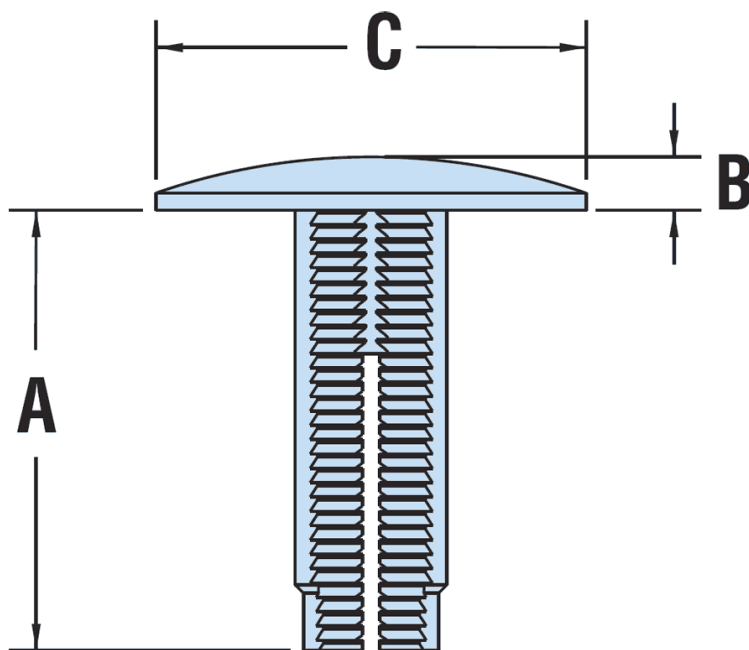

Details:

- **Material:** Nylon 6/6
- **Colour:** natural
- Flammability Rating: UL 94 V-2
- Temperature Range: 0°C to 85°C
- Complete assembly requires two parts. They snap into each other, thus holding flat panels together.
- Recommended snap rivet: [H-4714](#)

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-12480	7.1	6.0 - 7.5	5.7	1.6	10.3	PA 66	UL94 V-2	natural
H-12481	7.1	8.8 - 12.7	8.7	1.6	10.3	PA 66	UL94 V-2	natural
H-12482	7.1	12.7 - 20.7	12.4	1.6	10.3	PA 66	UL94 V-2	natural
H-12483	7.1	19.8 - 34.9	19.5	1.6	10.3	PA 66	UL94 V-2	natural
H-12484	7.1	6.0 - 7.6	5.7	2.4	19.1	PA 66	UL94 V-2	natural
H-12485	7.1	8.8 - 12.7	8.7	2.4	19.1	PA 66	UL94 V-2	natural
H-12486	7.1	12.7 - 20.6	12.4	2.4	19.1	PA 66	UL94 V-2	natural
H-12487	7.1	19.8 - 34.9	19.5	2.4	19.1	PA 66	UL94 V-2	natural