


H-S - Snap-In Smooth Bore Bushings

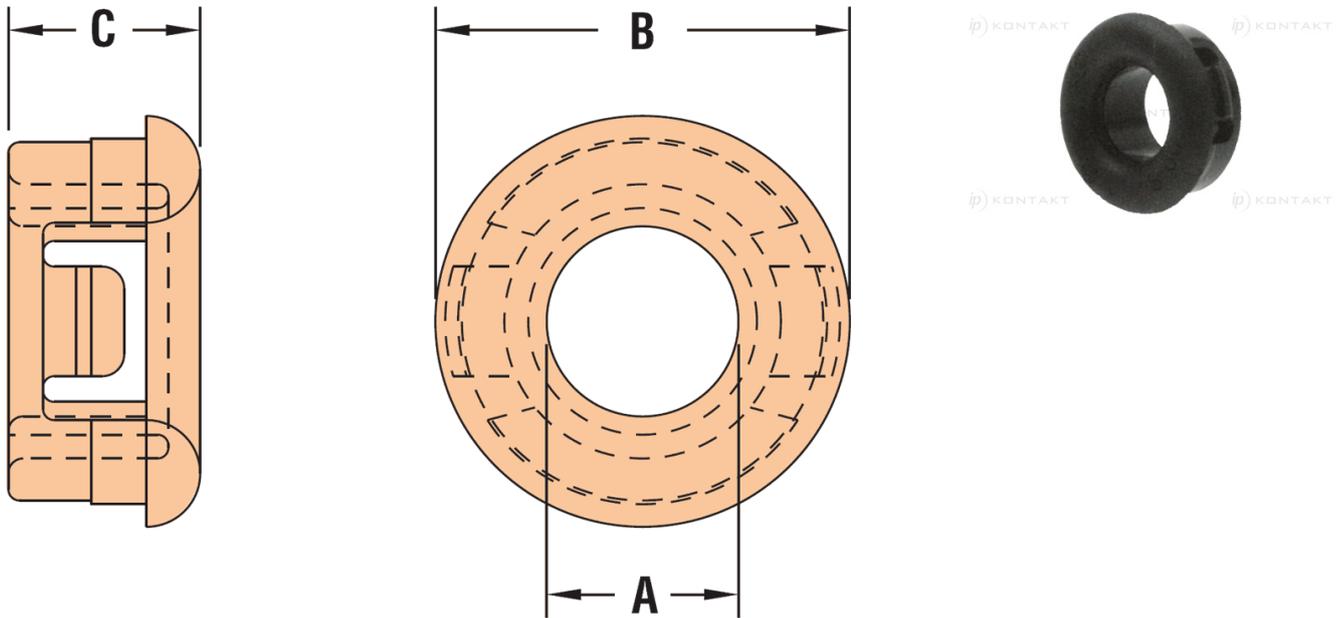

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: black (white and other colours available on special order)**
- **Temperature Range: -18°C to 105°C**

Symbol	Mounting hole diameter	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2514	12.7	6.4	14.2	6.9	1.6 max.	PA 66	UL94 V-2	black
H-2540	22.3	13.2	24.9	8.1	1.6 max.	PA 66	UL94 V-2	black
H-2516	15.9	6.4	18.3	11.2	3.2 max.	PA 66	UL94 V-2	black
H-2535	19.1	9.1	23.1	11.2	3.2 max.	PA 66	UL94 V-2	black
H-2552	22.3	14.2	24.6	13.1	3.2 max.	PA 66	UL94 V-2	black
H-2554	25.4	15.2	30.2	13.1	3.2 max.	PA 66	UL94 V-2	black
H-2555	27.8	16	30.7	13.1	3.2 max.	PA 66	UL94 V-2	black