
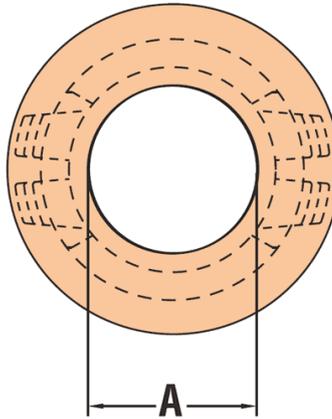


H-SB-KO - Knock-Out Snap Bushings

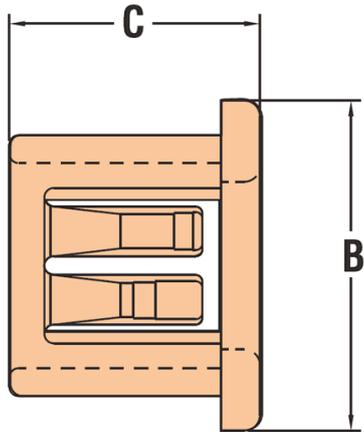

Details:

- **Material: Nylon 6/6 UL94 HB**
- **Colour: black**
- **Temperature Range: -18°C to 105°C**

Symbol	Nominal diameter	Mounting hole diameter range	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[in]	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2126-KO	1/2	22.2	17.5	24.2	11.5	3.2 max.	PA 66	UL94 HB	black
H-2166-KO	3/4	27.8 - 28.6	23.8	30.9	11.5	3.2 max.	PA 66	UL94 HB	black
H-2210-KO	1	34.9	25.8	37.3	11.5	3.2 max.	PA 66	UL94 HB	black
H-2300-KO	1.1/4	44.5	34.9	47.6	11.5	3.2 max.	PA 66	UL94 HB	black
H-2406-KO	1.1/2	50.8	44.5	54	11.5	3.2 max.	PA 66	UL94 HB	black
H-2420-KO	2	63.5	50	67.5	8.3	6.4 max.	PA 66	UL94 HB	black