
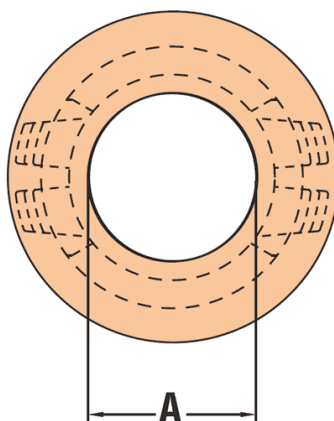


H-SBT -

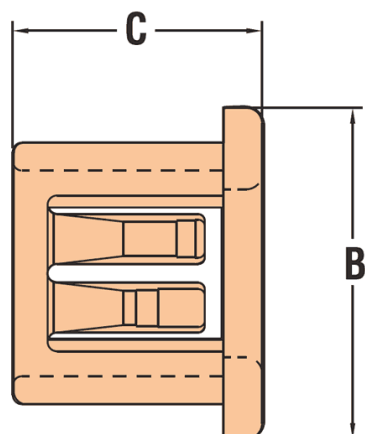

Details:

- **Material:** Nylon 6/6 UL94 HB
- **Colour:** black (BLK) or white (WH)
- Temperature Range: -18°C to 105°C
- H-3085 i H-3088 - Notched head, triple locking finger design
- H-2830, H-2831, H-2840, H-2841 - Single Locking Step for Panel Thickness up to 6,4 mm

Symbol	Mounting hole diameter range	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2017	9.5	7.1	11.9	10.3	4.3 max.	PA 66	UL94 HB	black
H-2018	9.5	7.1	11.9	10.3	4.3 max.	PA 66	UL94 HB	white
H-3085	25.4	20.3	28.8	11.4	4.3 max.	PA 66	UL94 HB	black
H-3088	25.4	20.3	28.8	11.4	4.3 max.	PA 66	UL94 HB	white
H-3126	12.7	9.9	14.7	14.3	6.4 max.	PA 66	UL94 HB	black
H-3127	12.7	9.9	14.7	14.3	6.4 max.	PA 66	UL94 HB	white
H-2830	15.9	12.7	17.9	13.5	6.4 max.	PA 66	UL94 HB	black
H-2831	15.9	12.7	17.9	13.5	6.4 max.	PA 66	UL94 HB	white
H-2840	19.1	15.9	21	13.5	6.4 max.	PA 66	UL94 HB	black
H-2841	19.1	15.9	21	13.5	6.4 max.	PA 66	UL94 HB	white
H-3104	22.2	17.5	24.2	14.3	6.4 max.	PA 66	UL94 HB	black
H-3105	22.2	17.5	24.2	14.3	6.4 max.	PA 66	UL94 HB	white
H-3108	25.4	19.4	28.6	14.3	6.4 max.	PA 66	UL94 HB	black
H-3109	25.4	19.4	28.6	14.3	6.4 max.	PA 66	UL94 HB	white
H-3128	27.8 - 28.6	23.8	30.9	14.3	6.4 max.	PA 66	UL94 HB	black
H-3129	27.8 - 28.6	23.8	30.9	14.3	6.4 max.	PA 66	UL94 HB	white
H-3130	30.2	23.8	33.3	14.3	6.4 max.	PA 66	UL94 HB	black
H-3131	30.2	23.8	33.3	14.3	6.4 max.	PA 66	UL94 HB	white
H-3132	31.8	25.4	33.2	14.3	6.4 max.	PA 66	UL94 HB	black
H-3133	31.8	25.4	33.2	14.3	6.4 max.	PA 66	UL94 HB	white
H-3110	34.9	25.4	38.1	14.3	6.4 max.	PA 66	UL94 HB	black
H-3111	34.9	25.4	38.1	14.3	6.4 max.	PA 66	UL94 HB	white

Symbol	Mounting hole diameter range	Int. diameter A	Ext. diameter B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-3112	38.1	33.3	41.2	14.3	6.4 max.	PA 66	UL94 HB	black
H-3113	38.1	33.3	41.2	14.3	6.4 max.	PA 66	UL94 HB	white
H-3114	44.5	34.9	47.6	14.3	6.4 max.	PA 66	UL94 HB	black
H-3115	44.5	34.9	47.6	14.3	6.4 max.	PA 66	UL94 HB	white
H-3116	50.8	41.3	54	14.3	6.4 max.	PA 66	UL94 HB	black
H-3117	50.8	41.3	54	14.3	6.4 max.	PA 66	UL94 HB	white