



H-SCG - Snap-In Cordgrip Strain Reliefs

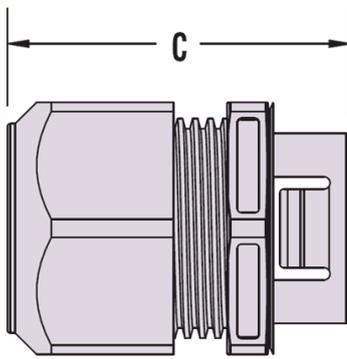

Sugerowany otwór przelotowy
do montażu zatraskowego
Suggested clearance hole
for snap-in mounting

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Temperature Range: -18°C to 105°C**
- **Panel thickness: 1.6 mm - 3.2 mm**
- **Colour: BLK - black, GR - grey**
- Unique fingers securely lock into a range of panel sizes without use of locknut.
- Smooth, rounded interior edges for ease of installation.
- Limited intrusion into enclosure where access is tight.
- Rotation prevented when used in Double D mounting holes.
- Easy to install-no tools required.
- Ratchet design of sealing nut assembly provides superior antivibration and ensures a firm grip on the cable.

Symbol	Cable diameter range	Mounting hole dimentions A × B	C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-M4802	5.3 - 5.3	12.7 × 11.4	30.7	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4803	5.3 - 5.3	12.7 × 11.4	30.7	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4800	6.1 - 6.4	12.7 × 11.4	30.7	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4801	6.1 - 6.4	12.7 × 11.4	30.7	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4808	5.3 - 5.8	15.9 × 14	33	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4809	5.3 - 5.8	15.9 × 14	33	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4806	5.3 - 8.0	15.9 × 14	33	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4807	5.3 - 8.0	15.9 × 14	33	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4814	5.8 - 6.6	19.1 × 16.8	37.6	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4815	5.8 - 6.6	19.1 × 16.8	37.6	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4812	5.8 - 10.2	19.1 × 16.8	37.6	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4813	5.8 - 10.2	19.1 × 16.8	37.6	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4820	6.5 - 7.4	22.2 × 19.6	37.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4821	6.5 - 7.4	22.2 × 19.6	37.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4818	6.4 - 11.4	22.2 × 19.6	37.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4819	6.4 - 11.4	22.2 × 19.6	37.1	1.6 - 3.2	PA 66	UL94 V-2	grey

Symbol	Cable diameter range	Mounting hole dimentions A × B	C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-M4826	7.6 - 10.2	25.4 × 22.2	41.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4827	7.6 - 10.2	25.4 × 22.2	41.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4824	8.9 - 13.8	25.4 × 22.2	41.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4825	8.9 - 13.8	25.4 × 22.2	41.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4832	9.8 - 12.4	27.8 × 24.6	44.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4833	9.8 - 12.4	27.8 × 24.6	44.5	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4830	11.0 - 17.9	27.8 × 24.6	44.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4831	11.0 - 17.9	27.8 × 24.6	44.5	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4838	9.8 - 12.4	28.6 × 25.4	44.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4839	9.8 - 12.4	28.6 × 25.4	44.5	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4836	11.0 - 17.9	28.6 × 25.4	44.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4837	11.0 - 17.9	28.6 × 25.4	44.5	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4844	12.4 - 19.9	31.8 × 28.6	52.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4845	12.4 - 19.9	31.8 × 28.6	52.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4842	15.0 - 25.4	31.8 × 28.6	52.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4843	15.0 - 25.4	31.8 × 28.6	52.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4850	12.4 - 19.9	34.9 × 31.8	52.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4851	12.4 - 19.9	34.9 × 31.8	52.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4848	15.0 - 25.4	34.9 × 31.8	52.1	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4849	15.0 - 25.4	34.9 × 31.8	52.1	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4856	20.0 - 25.9	38.1 × 34.9	56.6	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4857	20.0 - 25.9	38.1 × 34.9	56.6	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4854	22.2 - 32.0	38.1 × 34.9	56.6	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4855	22.2 - 32.0	38.1 × 34.9	56.6	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4862	20.0 - 25.9	44.5 × 41.3	57.9	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4863	20.0 - 25.9	44.5 × 41.3	57.9	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4860	22.2 - 32.0	44.5 × 41.3	57.9	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4861	22.2 - 32.0	44.5 × 41.3	57.9	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4868	25.4 - 31.5	50.8 × 47.6	61.2	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4869	25.4 - 31.5	50.8 × 47.6	61.2	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4866	31.2 - 39.6	50.8 × 47.6	61.2	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4867	31.2 - 39.6	50.8 × 47.6	61.2	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4874	29.5 - 34.3	60.3 × 57.2	63.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4875	29.5 - 34.3	60.3 × 57.2	63.5	1.6 - 3.2	PA 66	UL94 V-2	grey
H-M4872	36.8 - 39.6	60.3 × 57.2	63.5	1.6 - 3.2	PA 66	UL94 V-2	black
H-M4873	36.8 - 39.6	60.3 × 57.2	63.5	1.6 - 3.2	PA 66	UL94 V-2	grey