



H-SCG-PT - Snap-In Cordgrip Strain Reliefs – Pigtail

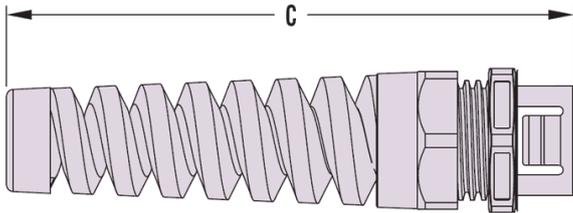

Sugerowany otwór przelotowy dla montażu bezgwintowego
Suggested clearance hole for nonthreaded mounting

Details:

- **Body material: Nylon 6/6**
- **Sealing gland material: Buna N**
- **Flammability: UL94 V-2**
- Certifications: UL File E51579, CAS File 093876
- Temperature Range: -18°C to 105°C

Symbol	Cable diameter range	A [mm]	B [mm]	C [mm]	Material	Flammability	Color
	[mm]						
H-M4902	5.3 - 5.3	12.7	11.4	63.5	PA 66	UL94 V-2	black
H-M4900	6.1 - 6.4	12.7	11.4	63.5	PA 66	UL94 V-2	black
H-M4908	5.3 - 5.8	15.9	14	71.9	PA 66	UL94 V-2	black
H-M4906	5.3 - 8.0	15.9	14	71.9	PA 66	UL94 V-2	black
H-M4914	5.8 - 6.6	19.1	16.8	87.9	PA 66	UL94 V-2	black
H-M4912	5.8 - 10.2	19.1	16.8	87.9	PA 66	UL94 V-2	black
H-M4920	6.5 - 7.4	22.2	19.6	98	PA 66	UL94 V-2	black
H-M4918	6.4 - 11.4	22.2	19.6	98	PA 66	UL94 V-2	black
H-M4926	7.6 - 10.2	25.4	22.2	109.5	PA 66	UL94 V-2	black
H-M4924	8.9 - 13.8	25.4	22.2	109.5	PA 66	UL94 V-2	black
H-M4932	9.8 - 12.4	27.8	24.6	124.5	PA 66	UL94 V-2	black
H-M4930	11 - 17.9	27.8	24.6	124.5	PA 66	UL94 V-2	black