



**H-SLP -**

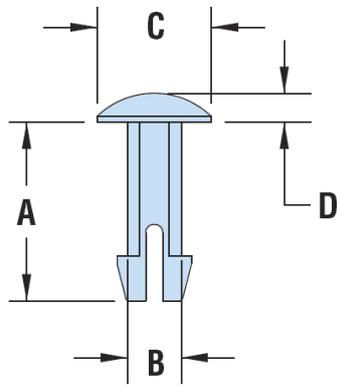

**Typ 1**  
Type 1

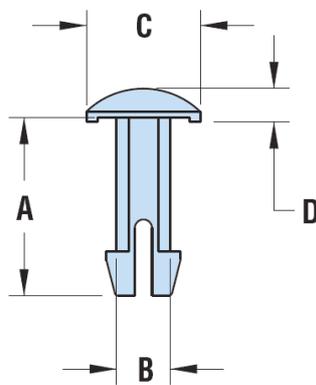

**Typ 2**  
Type 2



Details:

- **Material: Nylon 6/6**
- **Klasa palności: UL94 V-2**
- Zakres temperatur: -40°C do 85°C
- Used to fix connectors to the printed circuit board prior to wave soldering.

Symbol	Mounting hole diameter	Panel thickness	A	B	Head diameter C	Head height D	Type	Material	Flammability	Color
	[mm]									
H-12040	2.5	4.5	6.6	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12041	2.5	5.6	7.6	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12042	2.5	6	7.9	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12043	2.5	6.2	8.1	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12044	2.5	7.8	9.9	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12045	2.5	8	10	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12046	2.5	8.4	10.4	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12047	2.5	10.5	12.4	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12048	2.5	16.2	18.3	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12049	2.5	16.8	18.8	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12050	2.5	17.8	19.8	2.4	5.1	1.3	1	PA 66	UL94 V-2	natural
H-12051	2.5	4.5	6.6	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12052	2.5	5.6	7.6	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12053	2.5	6	7.9	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12054	2.5	6.2	8.1	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12055	2.5	7.8	9.9	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12056	2.5	8	10	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12057	2.5	8.4	10.4	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12058	2.5	10.5	12.4	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12059	2.5	16.2	18.3	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12060	2.5	16.8	18.8	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural
H-12061	2.5	17.8	19.8	2.4	5.1	1.5	2	PA 66	UL94 V-2	natural