


H-SMP-E-M - Metric Ergonomic Plugs

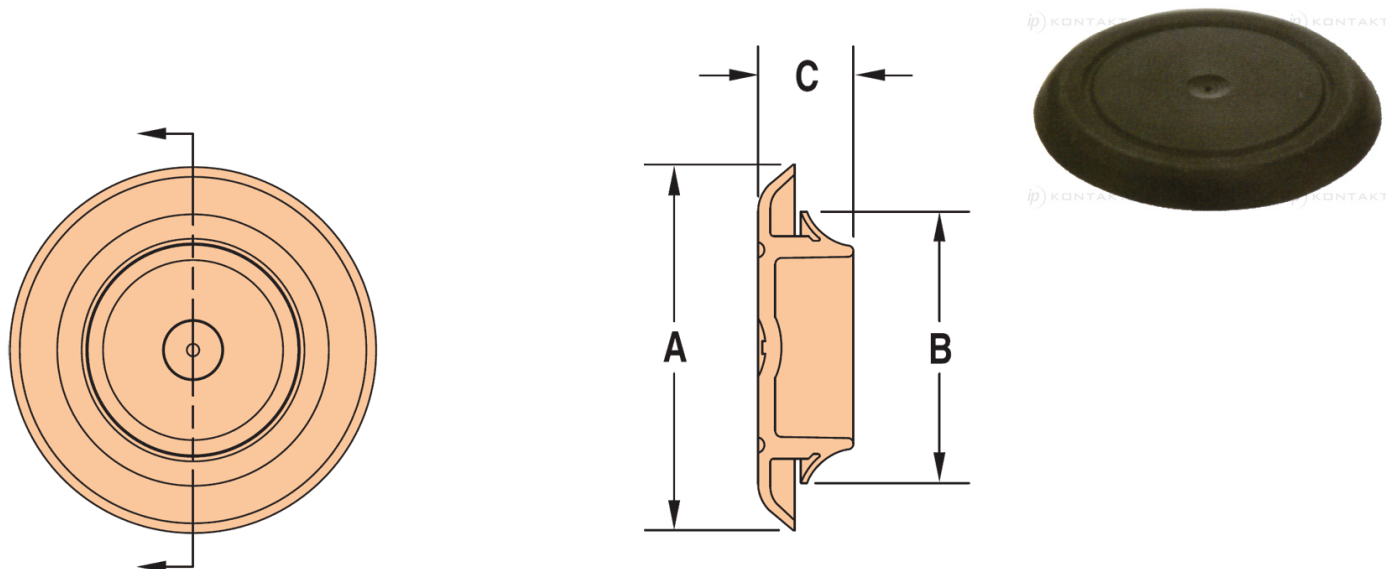

Details:

- **Material: Flex Temp (thermoplastic rubber)**
- **Flammability Rating: UL94 V-2**
- **Colour: black**
- **Temperature Range: -40°C to 105°C**

Symbol	Mounting hole nominal diameter	Mounting hole diameter range	Flange diameter A	B	Height C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			
H-9690	15	14.5 - 16.0	25	18	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9691	17	15.2 - 18.0	28	20.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9692	19	18.5 - 20.0	30.2	22.5	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9693	21	20.5 - 22.0	32	24.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9694	23	22.5 - 24.0	34	26.4	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9695	25	24.5 - 26.0	35	28	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9696	27	26.5 - 28.0	38	30.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9697	29	28.5 - 30.0	40	32.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9698	31	30.5 - 32.0	42	34.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black
H-9699	33	32.5 - 34.0	44	36.3	7.8	0.8 - 2.0	TPR	UL94 V-2	black