

IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-SP - Shorty Plugs



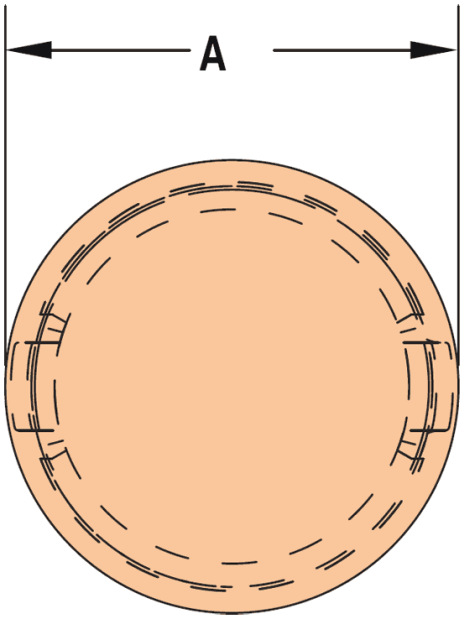

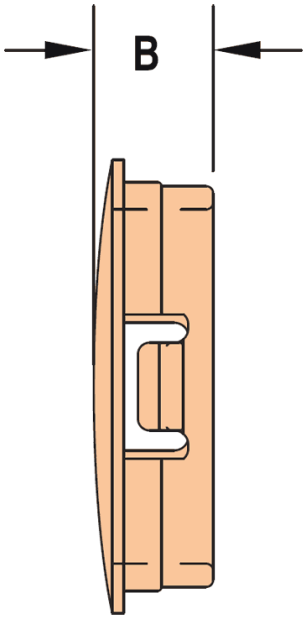

Details:

- **Material: Nylon 6/6**
- **Flammability Rating: UL94 V-2**
- **Colour: black or white (other colours available on special order)**
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919
- **Limited intrusion: 3.2 mm inside the panel.**
- Single Locking Step for Panel Thickness up to: 1.6 mm

Symbol	Mounting hole diameter	Ext. diameter A	Height B	Material	Flammability	Color
	[mm]	[mm]	[mm]			
H-1654	5.5	7.1	6.4	PA 66	UL94 V-2	black
H-1655	5.5	7.1	6.4	PA 66	UL94 V-2	white
H-1660	7.1	8.7	6.4	PA 66	UL94 V-2	black
H-1661	7.1	8.7	6.4	PA 66	UL94 V-2	white
H-1657	7.8	9.4	6.4	PA 66	UL94 V-2	black
H-1658	7.8	9.4	6.4	PA 66	UL94 V-2	white
H-1678	7.9	9.5	6.4	PA 66	UL94 V-2	black
H-1679	7.9	9.5	6.4	PA 66	UL94 V-2	white
H-1663	8.7	10.3	6.4	PA 66	UL94 V-2	black
H-1664	8.7	10.3	6.4	PA 66	UL94 V-2	white
H-1681	9.5	11.9	6.4	PA 66	UL94 V-2	black
H-1682	9.5	11.9	6.4	PA 66	UL94 V-2	white
H-1708	9.9	11.9	6.4	PA 66	UL94 V-2	black
H-1709	9.9	11.9	6.4	PA 66	UL94 V-2	white
H-1666	10.3	11.9	6.4	PA 66	UL94 V-2	black
H-1667	10.3	11.9	6.4	PA 66	UL94 V-2	white
H-1684	11.1	13.5	6.4	PA 66	UL94 V-2	black
H-1685	11.1	13.5	6.4	PA 66	UL94 V-2	white
H-1669	11.9	13.5	6.4	PA 66	UL94 V-2	black
H-1670	11.9	13.5	6.4	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter	Ext. diameter A	Height B	Material	Flammability	Color
	[mm]	[mm]	[mm]			
H-1687	12.7	14.3	6.4	PA 66	UL94 V-2	black
H-1688	12.7	14.3	6.4	PA 66	UL94 V-2	white
H-1672	13.5	15.1	6.4	PA 66	UL94 V-2	black
H-1673	13.5	15.1	6.4	PA 66	UL94 V-2	white
H-1675	15.1	17.5	6.4	PA 66	UL94 V-2	black
H-1676	15.1	17.5	6.4	PA 66	UL94 V-2	white
H-1690	15.9	18.3	6.4	PA 66	UL94 V-2	black
H-1691	15.9	18.3	6.4	PA 66	UL94 V-2	white
H-1719	17.4	20.1	6.4	PA 66	UL94 V-2	black
H-1720	17.4	20.1	6.4	PA 66	UL94 V-2	white
H-1693	19	21.4	6.4	PA 66	UL94 V-2	black
H-1694	19	21.4	6.4	PA 66	UL94 V-2	white
H-1696	19.8	22.6	6.4	PA 66	UL94 V-2	black
H-1697	19.8	22.6	6.4	PA 66	UL94 V-2	white
H-1699	22.2	24.6	6.4	PA 66	UL94 V-2	black
H-1700	22.2	24.6	6.4	PA 66	UL94 V-2	white
H-1702	25.4	30.5	6.4	PA 66	UL94 V-2	black
H-1703	25.4	30.5	6.4	PA 66	UL94 V-2	white
H-1705	27.8	31	6.4	PA 66	UL94 V-2	black
H-1706	27.8	31	6.4	PA 66	UL94 V-2	white