


## H-SP-N - Thin Panel Dome Plugs

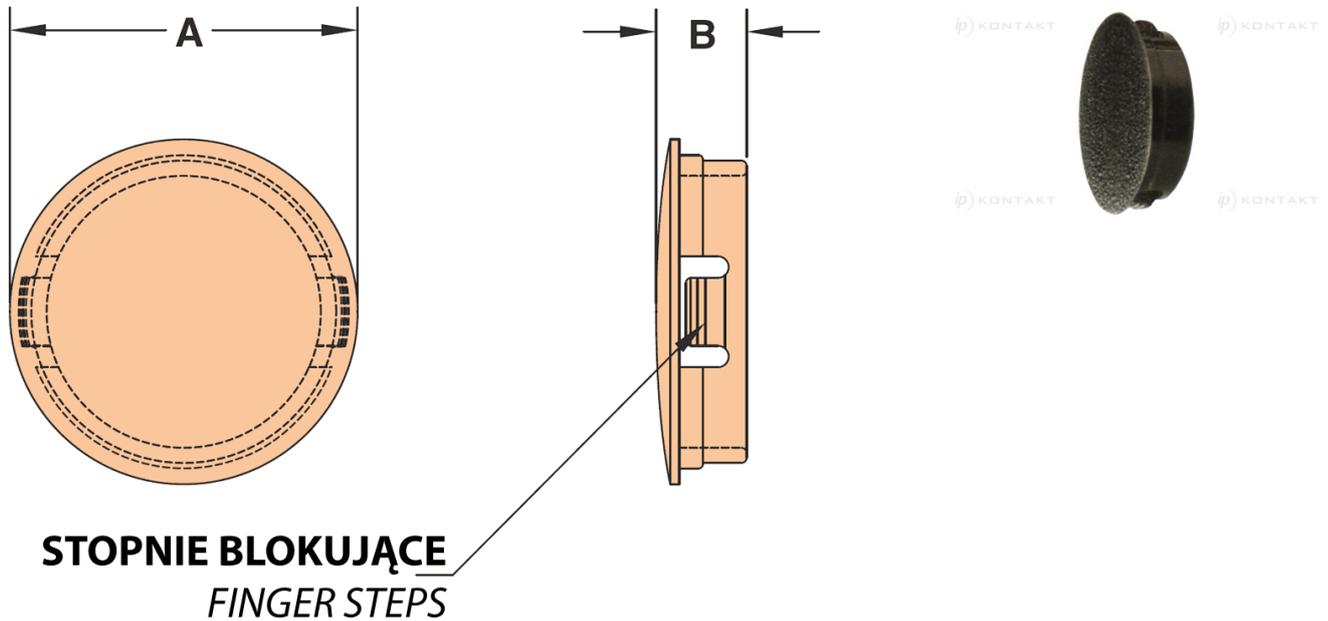

Details:

- **Material:** Nylon 6/6
- **Flammability Rating:** UL94 V-2
- **Colour:** black or white (other colours available on special order)
- Temperature Range: -40°C to 105°C
- Certifications: UL File E51579, CSA File 8919

Symbol	Locking steps	Mounting hole diameter	Ext. diameter A	Height B	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]			
H-1654N	0.5, 0.8, 1.2	5.5	7.1	6.4	PA 66	UL94 V-2	black
H-1655N	0.5, 0.8, 1.2	5.5	7.1	6.4	PA 66	UL94 V-2	white
H-2607N	0.5, 0.8, 1.2	6.4	7.9	6.4	PA 66	UL94 V-2	black
H-2608N	0.5, 0.8, 1.2	6.4	7.9	6.4	PA 66	UL94 V-2	white
H-1660N	0.5, 0.8, 1.2	7.1	8.7	6.4	PA 66	UL94 V-2	black
H-1661N	0.5, 0.8, 1.2	7.1	8.7	6.4	PA 66	UL94 V-2	white
H-1678N	0.5, 0.8, 1.2	7.9	9.5	6.4	PA 66	UL94 V-2	black
H-1679N	0.5, 0.8, 1.2	7.9	9.5	6.4	PA 66	UL94 V-2	white
H-1663N	0.5, 0.8, 1.2	8.7	10.3	6.4	PA 66	UL94 V-2	black
H-1664N	0.5, 0.8, 1.2	8.7	10.3	6.4	PA 66	UL94 V-2	white
H-1681N	0.5, 0.8, 1.2	9.5	11.9	6.4	PA 66	UL94 V-2	black
H-1682N	0.5, 0.8, 1.2	9.5	11.9	6.4	PA 66	UL94 V-2	white
H-1687N	0.5, 0.8, 1.0, 1.2, 1.6	12.7	14.3	6.4	PA 66	UL94 V-2	black
H-1688N	0.5, 0.8, 1.0, 1.2, 1.6	12.7	14.3	6.4	PA 66	UL94 V-2	white
H-1716N	0.5, 0.8, 1.0, 1.2, 1.6	13	14.3	6.4	PA 66	UL94 V-2	black
H-1717N	0.5, 0.8, 1.0, 1.2, 1.6	13	14.3	6.4	PA 66	UL94 V-2	white
H-1690N	0.5, 0.8, 1.0, 1.2, 1.6	15.9	18.3	6.4	PA 66	UL94 V-2	black
H-1691N	0.5, 0.8, 1.0, 1.2, 1.6	15.9	18.3	6.4	PA 66	UL94 V-2	white
H-1693N	0.5, 0.8, 1.0, 1.2, 1.6	19.1	23.8	6.4	PA 66	UL94 V-2	black
H-1694N	0.5, 0.8, 1.0, 1.2, 1.6	19.1	23.8	6.4	PA 66	UL94 V-2	white
H-1699N	0.5, 0.8, 1.0, 1.2, 1.6	22.2	24.6	6.4	PA 66	UL94 V-2	black
H-1700N	0.5, 0.8, 1.0, 1.2, 1.6	22.2	24.6	6.4	PA 66	UL94 V-2	white