


H-SSRP - Two piece snap together rivets

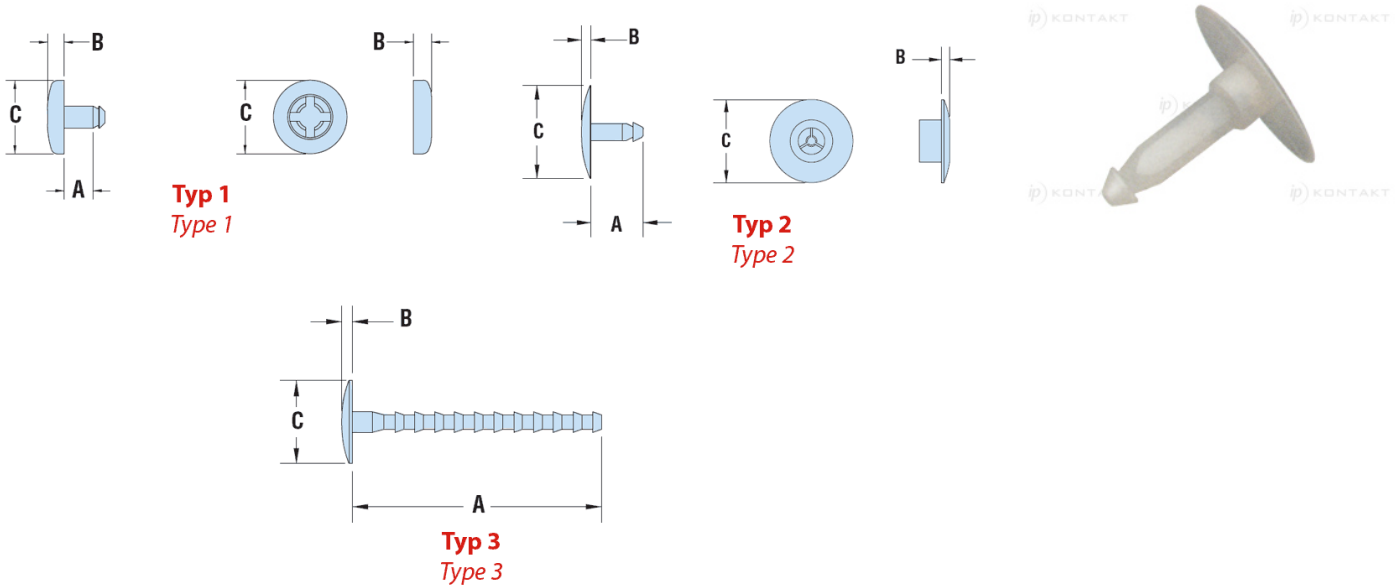

Details:

- **Material:** Nylon 6/6
- **Colour:** natural
- Flammability Rating: UL 94 V-2
- Temperature Range: 0°C to 85°C
- For H-4714 rivet we recommend [H-RR](#) Ratchet Rivet

Symbol	Mounting hole diameter	Panel thickness range	A	Head height B	Head diameter C	Type	Material	Flammability	Color
	[mm]								
H-4064	3.2	0.8	1.6	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4065	3.2	1.6	2.4	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4069	3.2	2.5	3.4	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4071	3.2	3.2	4	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4073	3.2	4.8	5.6	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4075	3.2	6.4	7.2	2.3	10.2	1	PA 66	UL94 V-2	natural
H-4715	8.1	4.3 - 4.8	5.3	1.6	10.2	2	PA 66	UL94 V-2	natural
H-4716	8.1	5.6 - 6.1	6.6	1.6	10.2	2	PA 66	UL94 V-2	natural
H-4717	8.1	8.1 - 8.6	8.9	1.6	10.2	2	PA 66	UL94 V-2	natural
H-4718	8.1	8.1 -15.2	16	1.6	10.2	2	PA 66	UL94 V-2	natural
H-4714	8.1	adjustable	38.1	1.6	12.7	3	PA 66	UL94 V-2	natural

Female caps for above rivets:

Part No.	B	C	For rivet type
	[mm]		
H-4077	2.5	10.2	1
H-4719	1.6	15.9	2 and 3