

**IP Kontakt**
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

# H-ST-01N - Strain Relief Bushings

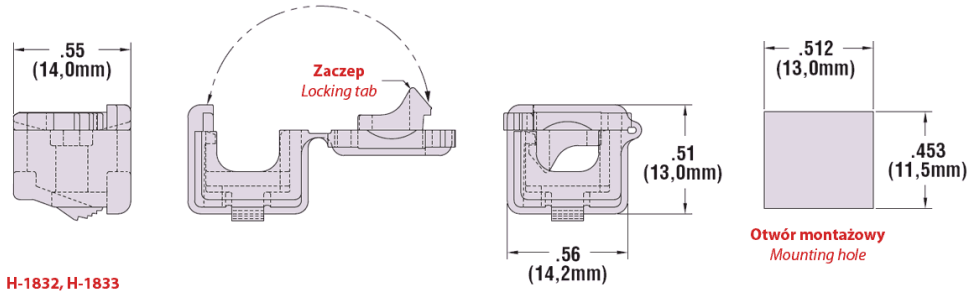


H-1832, H-1833

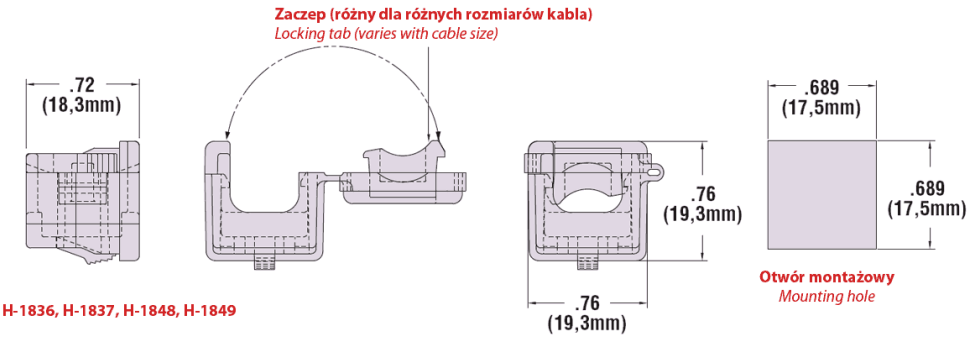


H-1836, H-1837, H-1848, H-1849



Details:

- **Material: Nylon 6/6**
- **Colour: black (BLK) or white (WH)**
- **Flammability Rating UL94 V-2**
- Certifications Recognized under the Component Program of Underwriters' Laboratories File E15331
- Certified by the Canadian Standards Association File 8919
- Temperature Range: -18°C to 105°C

| Symbol | Cable diameter range | Mounting hole dimentions | Panel thickness range | Material | Flammability | Color |
|---|---|---|---|---|---|---|
| | [mm] | [mm] | [mm] | | | |
| H-1832 | 5.6 - 7.4 | 11.5 × 13.0 | 1.1, 1.2, 1.6, 2.5 | PA 66 | UL94 V-2 | black |
| H-1833 | 5.6 - 7.4 | 11.5 × 13.0 | 1.1, 1.2, 1.6, 2.5 | PA 66 | UL94 V-2 | white |
| H-1836 | 7.4 - 9.1 | 17.5 × 17.5 | 1.6, 2.5, 3.2, 4 | PA 66 | UL94 V-2 | black |
| H-1837 | 7.4 - 9.1 | 17.5 × 17.5 | 1.6, 2.5, 3.2, 4 | PA 66 | UL94 V-2 | white |
| H-1848 | 9.0 - 10.6 | 17.5 × 17.5 | 1.6, 2.5, 3.2, 4 | PA 66 | UL94 V-2 | black |
| H-1849 | 9.0 - 10.6 | 17.5 × 17.5 | 1.6, 2.5, 3.2, 4 | PA 66 | UL94 V-2 | white |