
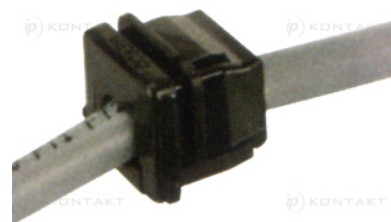


H-ST-SR - Strain relief bushings

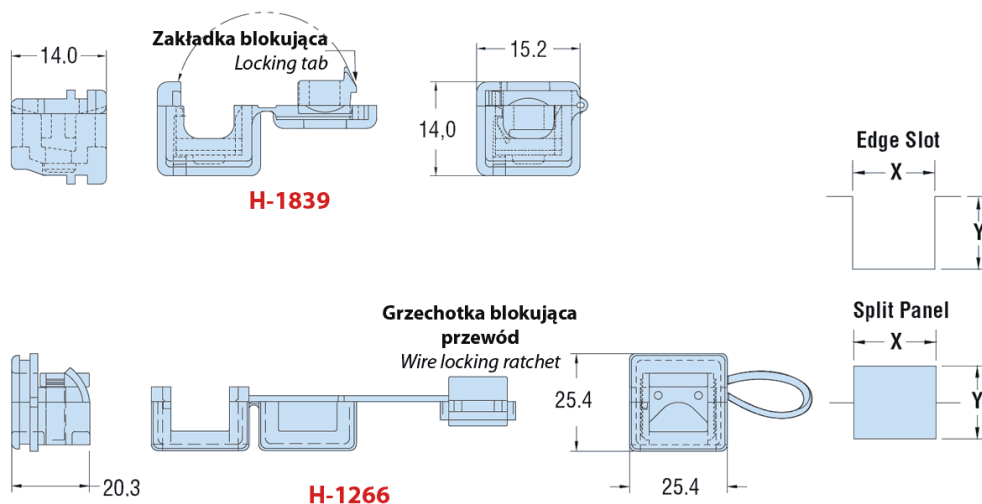

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour black. White and other colours available on special order.**
- Designed to be installed in a split panel mounting hole or dropped into a slot.
- Can be used for one wire or bundles of wire (round or flat wire).
- Securely anchors, insulates, and protects wire at panel entry points against forces of pull, push, or twist.
- Part H-1266 is assembly friendly and self-locks onto the wire. It may be preassembled offline for final assembly at a later time or remote location, for lower installed cost and faster assembly. It has a unique wire locking ratchet that allows for generous wire range from 6,4 mm to 15,2 mm.
- Part H-1266 UL recognized for multiple cables/conductors.

Symbol	AWG	Cable diameter range	X	Y	Panel thickness	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]			
H-1839	18/2, 18/3, 18/2, 16/2	5.6, 6.2, 6.4, 6.5, 6.9, 7.4	13	11.5	1.6	PA 66	UL94 V-2	black
H-1266	-	15.2 max.	22.2	22.2	2.5	PA 66	UL94 V-2	black