
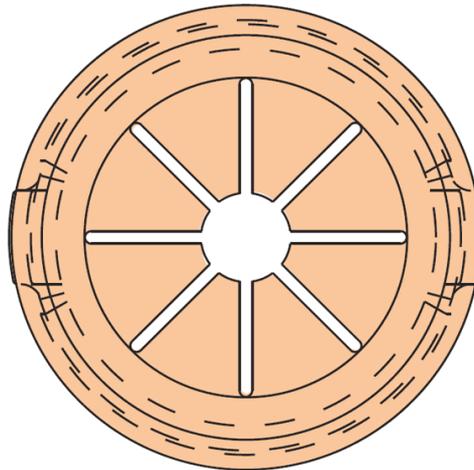


H-SUB - Shorty Universal Bushings

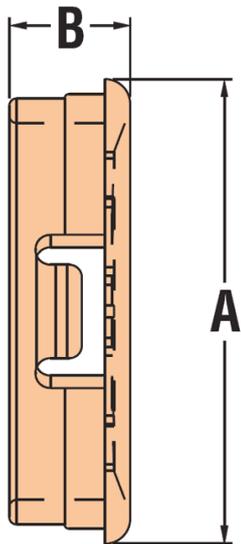

Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (other colours available on special order)
- **Temperature Range:** -18°C to 105°C

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2858	12.7	7.6	15.2	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2861	15.9	11.1	18.5	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2862	19.1	12.7	21.8	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2863	22.2	14.3	23.8	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2864	25.4	19	27	6.4	1.6 max.	PA 66	UL94 V-2	black
H-2158	27.8	20.6	29.4	6.4	1.6 max.	PA 66	UL94 V-2	black