IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-SunRunner-90 - SunRunner® 90° Cable Clips

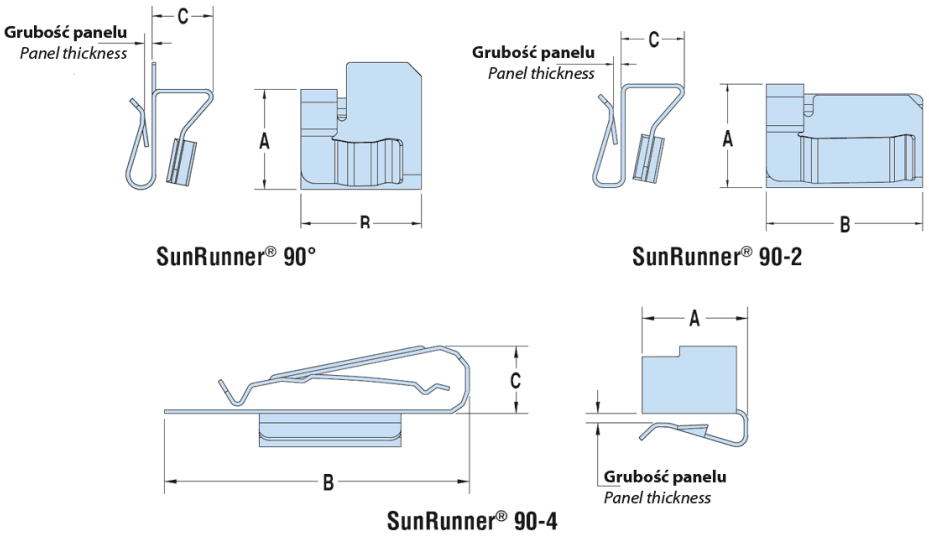

Details:

- **Material:**
  - **SunRunner 90-4: 5.08 mm thick heat treated 410 stainless steel**
  - **SunRunner 90° and SunRunner 90-2: 6.35 mm thick 304 stainless steel**
- SunRunner 90° Cable Clips are designed to mount at a 90° angle to the original SunRunner®.
- The SunRunner 90° will accommodate a single cable from .20″ (5,1 mm) to .33″ (8,3 mm); SunRunner 90-2 will accommodate (2) of these cables; SunRunner 4 will accommodate (4) cables from .30″ (7,6 mm) to .20″ (5,1 mm).
- SunRunner 90° Series is designed for use with PV modules mounted in the “landscape” mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° Series will also allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.
- Not for use in a marine salt water environment.
- DFARS Compliant.

Symbol	Type	Panel thickness range	Cable diameter range	Number of wires	A	B	C	Material	Standard pack
		[mm]	[mm]		[mm]	[mm]	[mm]		[szt./pcs]
H-S6406	SunRunner® 90° Clip	1.4 - 3.2	5.1 - 8.3	1	20.8	19.8	9.9	Stainless steel 304	100
H-S6446	SunRunner® 90° Clip	1.4 - 3.2	5.1 - 8.3	1	20.8	19.8	9.9	Stainless steel 304	1
H-S6436	SunRunner® 90°-2 Clip	1.4 - 3.2	5.1 - 8.3	2	16.5	24.9	9.9	Stainless steel 304	100
H-S6476	SunRunner® 90°-2 Clip	1.4 - 3.2	5.1 - 8.3	2	16.5	24.9	9.9	Stainless steel 304	1
H-S6439	SunRunner® 90°-4 Clip	1.4 - 3.2	5.1 - 8.3	4	14.2	41.4	9.1	Stainless steel 410	100
H-S6479	SunRunner® 90°-4 Clip	1.4 - 3.2	5.1 - 8.3	4	14.2	41.4	9.1	Stainless steel 410	1