


## H-TCN - Tension Wire Clips - Nylon

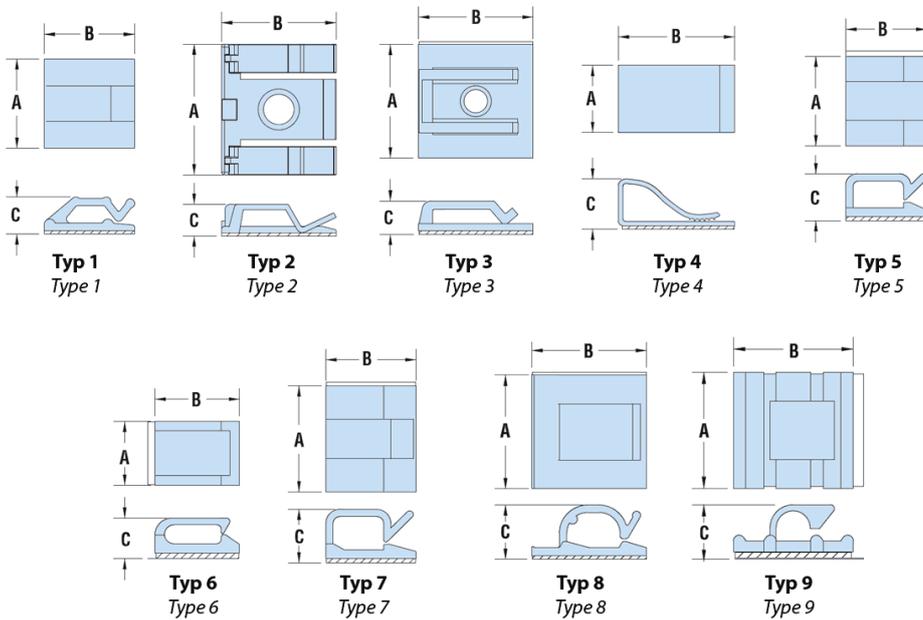

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural, grey
- **Temperature Range:** -40°C to 85°C
- **Adhesive-Back:** 1.6 mm, temperature range 0°C to 85°C

Symbol	Release tab	Wire height	Wire width	A	B	C	Type	Notes	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]					
H-3638	no	3.2	6.4	15.9	15.9	6.4	1	-	PA 66	UL94 V-2	natural
H-3639	no	3.2	12.7	29.2	25.4	7.1	2	May also be M4 (#8) screw mounted	PA 66	UL94 V-2	natural
H-3649	yes	3	15.8	25.4	25.4	7.4	3	May also be M4 (#8) screw mounted	PA 66	UL94 V-2	natural
H-12950	yes	6.4	22.4	15	25.8	10.3	4	-	PA 66	UL94 V-2	grey
H-12951	yes	6.4	22.4	15	25.8	10.3	4	-	PA 66	UL94 V-2	natural
H-12953	yes	6	4.7	16	11.4	8.1	5	-	PA 66	UL94 V-2	natural
H-12954	yes	8	4.7	16	13.4	8.1	5	-	PA 66	UL94 V-2	natural
H-12955	yes	8.2	5.2	16	14.4	8.7	5	-	PA 66	UL94 V-2	natural
H-12956	yes	9	4.8	16	14.4	8.3	5	-	PA 66	UL94 V-2	natural
H-12957	yes	9	5.2	14	13	8.7	5	-	PA 66	UL94 V-2	natural
H-12959	yes	10.2	6.7	16	16.9	10.2	5	-	PA 66	UL94 V-2	natural
H-12961	yes	4.3	2.5	10	9.5	5.9	6	-	PA 66	UL94 V-2	natural
H-12962	yes	6.3	2.5	12	9.5	6.3	6	-	PA 66	UL94 V-2	natural
H-12963	yes	8.4	2.5	12.5	9.5	6	6	-	PA 66	UL94 V-2	natural
H-12964	yes	8.2	2.5	12.7	12.7	6.3	6	-	PA 66	UL94 V-2	natural
H-12965	yes	10.3	2.5	14.5	9.5	6.4	6	-	PA 66	UL94 V-2	natural
H-12966	yes	11.6	3.1	16.7	13	6.6	6	-	PA 66	UL94 V-2	natural
H-12968	yes	7.9	6	14.9	19	9.5	7	-	PA 66	UL94 V-2	natural
H-12969	yes	9	6	16	19	9.5	7	-	PA 66	UL94 V-2	natural
H-12971	yes	11.8	7.9	19	19	11.8	7	-	PA 66	UL94 V-2	natural
H-12972	yes	13.7	8.3	20.9	19	12.1	7	-	PA 66	UL94 V-2	natural

Symbol	Release tab	Wire height	Wire width	A	B	C	Type	Notes	Material	Flammability	Color
		[mm]	[mm]	[mm]	[mm]	[mm]					
H-3629	no	4.8	4.8	15.9	15.9	7.9	8	-	PA 66	UL94 V-2	natural
H-3636	no	5.5	6.1	15.9	15.9	9.5	8	-	PA 66	UL94 V-2	natural
H-3637	yes	8.9	9.1	19.1	19.1	12.7	8	-	PA 66	UL94 V-2	natural
H-12974	yes	11.7	7.9	25.4	15.6	12.2	8	-	PA 66	UL94 V-2	natural
H-12975	yes	11.8	7.9	25.4	25.4	12.1	8	-	PA 66	UL94 V-2	natural
H-3628	no	4.8	4.8	15.5	15.5	7.1	9	-	PA 66	UL94 V-2	natural