
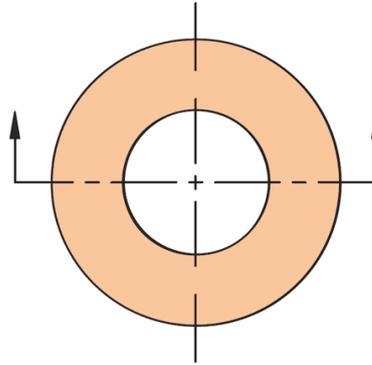


H-TG - Thermoplastic Rubber Grommet

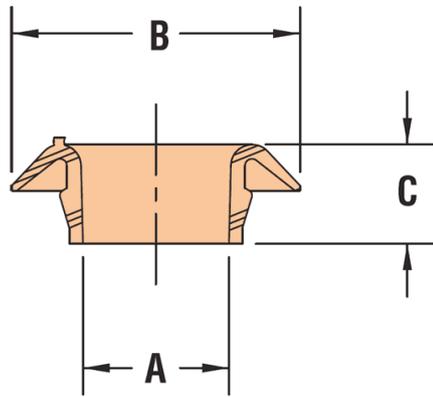

Details:

- **Material: Flex Temp (thermoplastic rubber)**
- **Colour: black**
- **Temperature Range: 0°C to 50°C**
- Certifications: UL File E15331

Symbol	Mounting hole diameter	A	B	C	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]				
H-G1505	12.7	10.4	20.6	7.1	2.0 max.	TPR	UL94 HB	black
H-G1506	15.9	13.2	23.6	7.9	2.0 max.	TPR	UL94 HB	black
H-G1507	19.1	16.5	26.9	8.9	2.0 max.	TPR	UL94 HB	black
H-G1508	22.2	19.6	30.2	8.9	2.0 max.	TPR	UL94 HB	black
H-G1509	25.4	22.6	33.5	8.9	2.0 max.	TPR	UL94 HB	black
H-G1510	31.8	28.4	40.6	8.9	2.0 max.	TPR	UL94 HB	black