


## H-TP - Threaded plugs

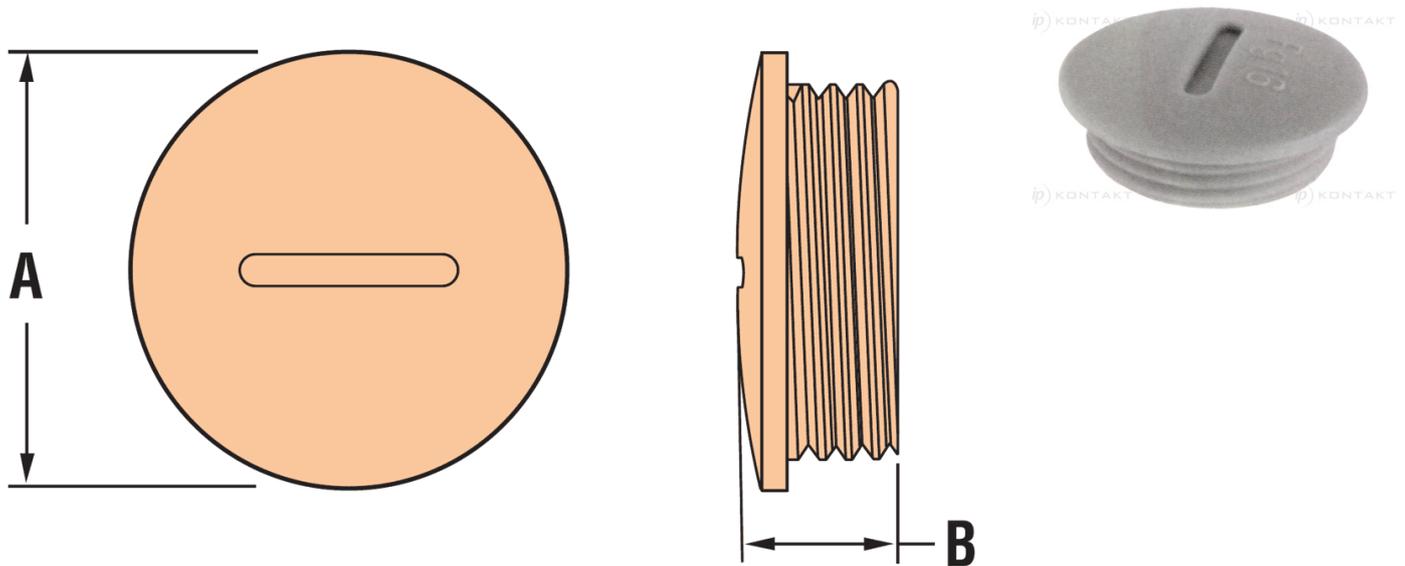

### Details:

- **Material: Nylon 6/6 or Impact Resistant Polystyrene**
- **Flammability Rating: UL94 V-2**
- **IP rating: IP 50**
- **Colour: grey, black (other colours available on special order)**
- **Temperature Range: -20°C to 80°C**

Symbol	Metric thread	PG thread	A	B	Material	Flammability	Color
			[mm]	[mm]			
H-3403	M12×1.5	-	15	10.5	PA 66	UL94 V-2	grey
H-3403B	M12×1.5	-	15	10.5	PA 66	UL94 V-2	black
H-3404	M16×1.5	-	20	10.5	PA 66	UL94 V-2	grey
H-3404B	M16×1.5	-	20	10.5	PA 66	UL94 V-2	black
H-3406	M20×1.5	-	24	10.5	PA 66	UL94 V-2	grey
H-3406B	M20×1.5	-	24	10.5	PA 66	UL94 V-2	black
H-3408	M25×1.5	-	30	13	PA 66	UL94 V-2	grey
H-3408B	M25×1.5	-	30	13	PA 66	UL94 V-2	black
H-3409	M32×1.5	-	37	13.5	PA 66	UL94 V-2	grey
H-3409B	M32×1.5	-	37	13.5	PA 66	UL94 V-2	black
H-3410	M40×1.5	-	46	14	PA 66	UL94 V-2	grey
H-3410B	M40×1.5	-	46	14	PA 66	UL94 V-2	black
H-3411	M50×1.5	-	56	16	PA 66	UL94 V-2	grey
H-3411B	M50×1.5	-	56	16	PA 66	UL94 V-2	black
H-3413	M63×1.5	-	70	18	PA 66	UL94 V-2	grey
H-3413B	M63×1.5	-	70	18	PA 66	UL94 V-2	black
H-3405	-	PG7	15	8	PA 66	UL94 V-2	grey
H-3405B	-	PG7	15	8	PA 66	UL94 V-2	black
H-3407	-	PG9	19	9.5	PA 66	UL94 V-2	grey
H-3407B	-	PG9	19	9.5	PA 66	UL94 V-2	black
H-3402	-	PG11	22	10	PA 66	UL94 V-2	grey
H-3402B	-	PG11	22	10	PA 66	UL94 V-2	black

Symbol	Metric thread	PG thread	A	B	Material	Flammability	Color
			[mm]	[mm]			
H-3412	-	PG13	25	10	PA 66	UL94 V-2	grey
H-3412B	-	PG13	25	10	PA 66	UL94 V-2	black
H-3414	-	PG16	27	10	PA 66	UL94 V-2	grey
H-3414B	-	PG16	27	10	PA 66	UL94 V-2	black
H-3416	-	PG21	33	12	PA 66	UL94 V-2	grey
H-3416B	-	PG21	33	12	PA 66	UL94 V-2	black
H-3418	-	PG29	44	12	PA 66	UL94 V-2	grey
H-3418B	-	PG29	44	12	PA 66	UL94 V-2	black
H-3415	-	PG36	55	14	PA 66	UL94 V-2	grey
H-3415B	-	PG36	55	14	PA 66	UL94 V-2	black
H-3400	-	PG42	62	16	PA 66	UL94 V-2	grey
H-3400B	-	PG42	62	16	PA 66	UL94 V-2	black
H-3417	-	PG48	69	16	PA 66	UL94 V-2	grey
H-3417B	-	PG48	69	16	PA 66	UL94 V-2	black