
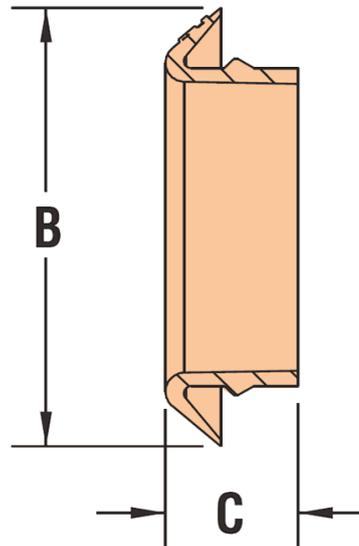


H-TRG - Thermoplastic Rubber Grommets

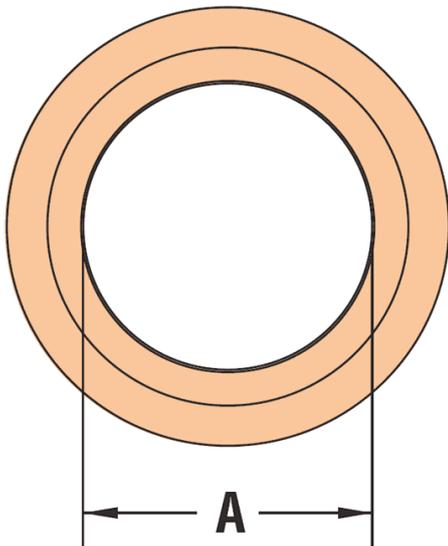

Details:

- **Material: Flex Temp (thermolastic rubber) UL94 HB**
- **Colour: black**
- Temperature range: 0°C to 50°C
- Certificate: UL File 15331

Symbol	Mounting hole diameter	A	B	C	Panel thickness range	Material	Flammability	Color
	[mm]							
H-13804	9.5	7.1	17.8	9.1	0.8 - 2.4	TPR	UL94 HB	black
H-13808	12.7	10.4	21.1	9.1	0.8 - 2.4	TPR	UL94 HB	black
H-13813	15.9	13.5	24.1	9.1	0.8 - 2.4	TPR	UL94 HB	black
H-13817	19.1	16.8	27.2	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13821	22.2	20.1	30.5	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13824	25.4	23.1	33.8	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13828	27.8	25.7	36.1	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13831	31.8	29	39.9	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13833	34.9	32	43.2	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13835	38.1	35.3	46.5	9.1	0.8 - 3.2	TPR	UL94 HB	black
H-13840	50.8	48	59.2	9.1	0.8 - 3.2	TPR	UL94 HB	black