
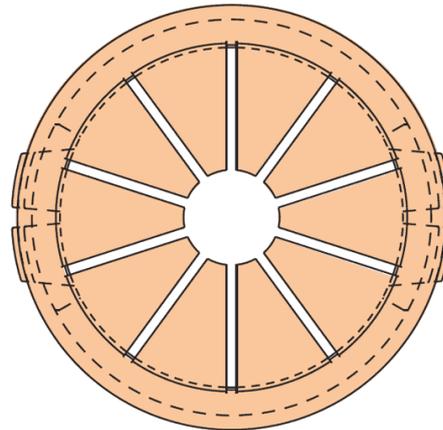


## H-UB - Universal Bushings

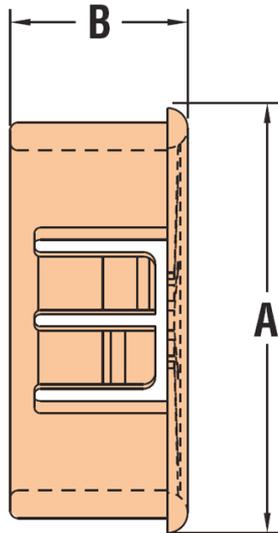

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** black (BLK) or white (WH)
- **Temperature Range:** -18°C to 105°C

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2055	12.7	7.6	15.2	9.8	3.2 max.	PA 66	UL94 V-2	black
H-2056	12.7	7.6	15.2	9.8	3.2 max.	PA 66	UL94 V-2	white
H-2077	15.9	11.1	18.5	10.3	3.2 max.	PA 66	UL94 V-2	black
H-2076	15.9	11.1	18.5	10.3	3.2 max.	PA 66	UL94 V-2	white
H-2089	19.1	12.7	21.4	9.9	3.2 max.	PA 66	UL94 V-2	black
H-2085	19.1	12.7	21.4	9.9	3.2 max.	PA 66	UL94 V-2	white
H-2106	20.6	12.7	22.6	9.9	3.2 max.	PA 66	UL94 V-2	black
H-2107	20.6	12.7	22.6	9.9	3.2 max.	PA 66	UL94 V-2	white
H-2119	22.2	14.3	23.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2129	22.2	14.3	23.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2118	22.2	14.3	23.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2137	25.4	19.1	27	11.2	3.2 max.	PA 66	UL94 V-2	black
H-2138	25.4	19.1	27	11.2	3.2 max.	PA 66	UL94 V-2	white
H-2157	27.8	20.6	29.5	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2162	27.8	20.6	29.5	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2153	30.2	24.1	31.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2154	30.2	24.1	31.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2155	31.8	25.8	33.4	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2156	31.8	25.8	33.4	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2184	34.9	25.4	37.8	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2185	34.9	25.4	37.8	11.5	3.2 max.	PA 66	UL94 V-2	white
H-2187	34.9	25.4	44.5	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2213	38.1	26.9	40.9	11.5	3.2 max.	PA 66	UL94 V-2	black
H-2214	38.1	26.9	40.9	11.5	3.2 max.	PA 66	UL94 V-2	white

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-2298	44.5	34.9	47.5	11.8	3.2 max.	PA 66	UL94 V-2	black
H-2299	44.5	34.9	47.5	11.8	3.2 max.	PA 66	UL94 V-2	white
H-2422	50.8	41.6	54	12.4	3.2 max.	PA 66	UL94 V-2	black
H-2423	50.8	41.6	54	12.4	3.2 max.	PA 66	UL94 V-2	white
H-2440	63.5	50	66.8	19.05	6.4 max.	PA 66	UL94 V-2	black
H-2441	63.5	50	66.8	19.05	6.4 max.	PA 66	UL94 V-2	white
H-2460	76.2	62.7	80	19.05	6.4 max.	PA 66	UL94 V-2	black
H-2463	76.2	62.7	80	19.05	6.4 max.	PA 66	UL94 V-2	white