


H-UBT - Thick Panel Universal Bushings

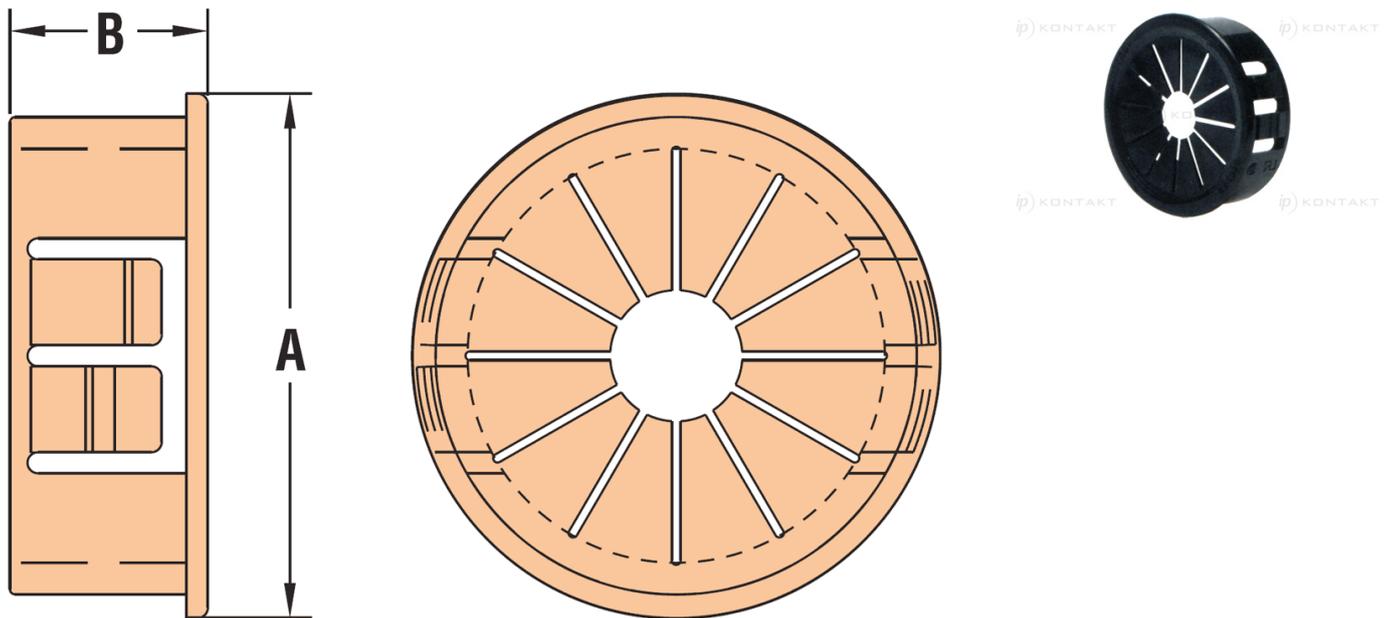

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: black (white and other colours available on special order)**
- Temperature Range: -18°C to 105°C
- H-3118 i H-3119 - single locking step

Symbol	Mounting hole diameter	Max. cable bundle diameter	Ext. diameter A	Height B	Panel thickness range	Material	Flammability	Color
	[mm]	[mm]	[mm]	[mm]	[mm]			
H-3001	12.7	7.6	15.2	13.8	6.4 max.	PA 66	UL94 V-2	black
H-3118	15.9	11.1	18.5	13	6.4 max.	PA 66	UL94 V-2	black
H-3119	19.1	12.7	21.4	13.8	6.4 max.	PA 66	UL94 V-2	black
H-3120	22.2	14.3	23.8	13.8	6.4 max.	PA 66	UL94 V-2	black
H-3121	25.4	19.1	27	13.8	6.4 max.	PA 66	UL94 V-2	black
H-3002	27.8	20.6	29.5	13.8	6.4 max.	PA 66	UL94 V-2	black
H-3003	34.9	25.4	37.8	14.2	6.4 max.	PA 66	UL94 V-2	black
H-3122	38.1	26.9	40.9	14.2	6.4 max.	PA 66	UL94 V-2	black