IP Kontakt
Pl. Zwycięstwa 2E
90-312 Łódź
Poland
tel. +48 42 676 75 25
+48 42 674 22 74
+48 42 674 22 88
e-mail: *ipkontakt@ipkontakt.pl*

H-WCA - Locking Releasable Wire Clips - Adhesive-Back Mount

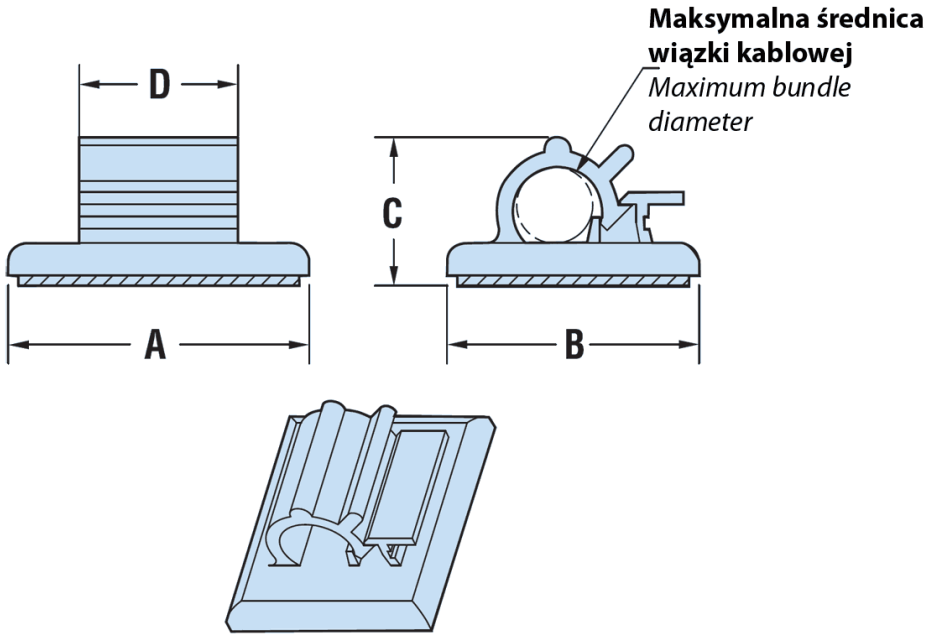

Details:

- **Material: Nylon 6/6 UL94 V-2**
- **Colour: grey or black**
- Temperature Range: -29°C do 66°C
- Adhesive backing on part has a tab for easy removal.
- Releasable and reusable clips for easy wire bundle routing.
- Quick and easy installation–simply peel off backing and press into place.
- Multiple sizes for bundles from 4.7 mm to 38.1 mm in diameter.
- Static Loads pertain to parts fastened to a flat, clean, and dry surface.

Symbol	Max. cable bundle diameter	A	B	C	D	Material	Flammability	Color	Notes
	[mm]	[mm]	[mm]	[mm]	[mm]				
H-3857	4.7	18.8	15.7	8.6	9.9	PA 66	UL94 V-2	grey	standard adhesive
H-3917	4.7	18.8	15.7	8.6	9.9	PA 66	UL94 V-2	black	standard adhesive
H-3858	6.4	25.4	22.1	10.7	16	PA 66	UL94 V-2	grey	standard adhesive
H-3918	6.4	25.4	22.1	10.7	16	PA 66	UL94 V-2	black	standard adhesive
H-3918A	6.4	25.4	22.1	10.7	16	PA 66	UL94 V-2	black	super adhesive
H-3859	9.5	25.4	25.4	12.7	16	PA 66	UL94 V-2	grey	standard adhesive
H-3919	9.5	25.4	25.4	12.7	16	PA 66	UL94 V-2	black	standard adhesive
H-3919A	9.5	25.4	25.4	12.7	16	PA 66	UL94 V-2	black	super adhesive
H-3860	12.7	25.4	30.7	17.3	16.3	PA 66	UL94 V-2	grey	standard adhesive
H-3920	12.7	25.4	30.7	17.3	16.3	PA 66	UL94 V-2	black	standard adhesive
H-3920A	12.7	25.4	30.7	17.3	16.3	PA 66	UL94 V-2	black	super adhesive
H-3861	19.1	29.2	36.8	25.1	16.3	PA 66	UL94 V-2	grey	standard adhesive
H-3921	19.1	29.2	36.8	25.1	16.3	PA 66	UL94 V-2	black	standard adhesive
H-3867	25.4	50.3	56.9	34.8	32	PA 66	UL94 V-2	grey	standard adhesive
H-3923	25.4	50.3	56.9	34.8	32	PA 66	UL94 V-2	black	standard adhesive
H-3868	38.1	61.5	74.9	45	33.3	PA 66	UL94 V-2	grey	standard adhesive
H-3930	38.1	61.5	74.9	45	33.3	PA 66	UL94 V-2	black	standard adhesive