


## H-WCL - Locking Releasable Wire Clip - Adjustable

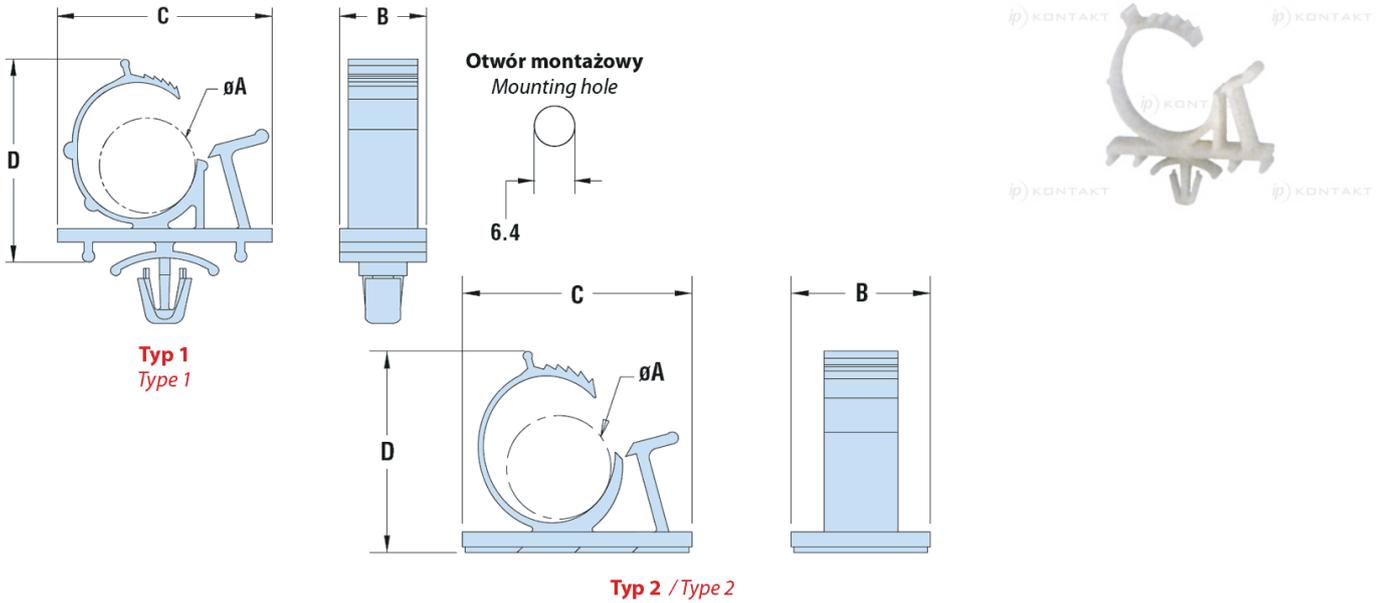

### Details:

- **Material:** Nylon 6/6 UL94 V-2
- **Colour:** natural
- Temperature Range: -40°C do 85°C
- Type 1:
  - Mounting hole diameter: 6.4 mmm
  - Gather and route wires.
  - Adjust to diameter needed to bundle.
  - Push mount design allows for fast installation.
- Type 2:
  - Adhesive layer thickness: 1.6 mm
  - Lock securely and easily. Re-open for routing changes.
  - Ratcheting clip holds bundle securely in place.
  - Good for high vibration applications.
  - Once closed the clip will not open until tab is released.

| Symbol | Cable diameter range | D    | B    | C    | Type  | Material | Flammability | Color |
|--------|----------------------|------|------|------|-------|----------|--------------|-------|
|        | A                    |      |      |      |       |          |              |       |
|        | [mm]                 | [mm] | [mm] | [mm] |       |          |              |       |
| H-4335 | 11.9 - 14.0          | 29.8 | 12.7 | 31.5 | PA 66 | UL94 V-2 | natural      | 1     |
| H-4336 | 14.7 - 19.1          | 34.5 | 12.7 | 37.6 | PA 66 | UL94 V-2 | natural      | 1     |
| H-4323 | 5.5 - 6.5            | 18.8 | 16.5 | 21.6 | PA 66 | UL94 V-2 | natural      | 2     |
| H-4324 | 7.9 - 10.3           | 22.8 | 19.1 | 25.4 | PA 66 | UL94 V-2 | natural      | 2     |
| H-4325 | 11.9 - 14.3          | 28.5 | 19.1 | 31.5 | PA 66 | UL94 V-2 | natural      | 2     |
| H-4326 | 14.7 - 19.1          | 33.6 | 19.1 | 38.1 | PA 66 | UL94 V-2 | natural      | 2     |
| H-4327 | 22.2 - 25.4          | 45.3 | 25.4 | 50.1 | PA 66 | UL94 V-2 | natural      | 2     |